

ICBCSOP2450TE/S/T**FEATURES**

The elegant, modern aesthetics pair perfectly with 60 cm and 76 cm Wolf cooking products as well as a full suite of similarly styled Sub-Zero appliances

Full-color touchscreen simplifies use and adds refinement to the design. Easily customize the user interface with drag-and-drop tile options.

Features both plumbed and non-plumbed options

Save up to 50 personalized favorite recipe presets.

11 Cooking Modes

1750-watt recessed broil element

The 60 cm model offers a 48 liter interior--space enough to prepare multiple dishes at once (or a 6.8-kg turkey). The 1889-Watt single convection system maintains heat and airflow to eliminate "cold spots"

Three full-extension rack positions and one standard position

Updated controls offer language translations

Large water tank

Temperature Probe

Sharpen your skillset with the Mastering the Convection Steam Oven guide

ACCESSORIES

Descaling Solution

Grill Rack

Perforated Pan - 451 x 32 x 381 mm

Porcelain Steam Enameled Broil Pan

Pro Handle

Solid Pan - 324 x 38 x 178 mm

Solid Pan - 451 x 32 x 381 mm

Standard Oven Rack

Temperature Probe

Accessories available through an authorized dealer.


For local dealer information, visit subzero-wolf.com/locator.




PRODUCT SPECIFICATIONS

Model	ICBCSOP2450TE/S/T
Dimensions	597mmW x 454mmH x 572mmD
Oven Interior Dimensions	445mmW x 273mmH x 384mmD
Capacity	34 L
Door Clearance	14 3/16"
Weight	91 lbs
Electrical Supply	220-240 VAC; 50 Hz
Electrical Service	3800 W
Plumbing Supply	2 m braided tubing with 3/8" female compression fitting
Plumbing Pressure	0.1–1.0 MPa
Conduit Length	1.2 Meters

ELECTRICAL




PLUMBING





NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified


DIMENSIONS

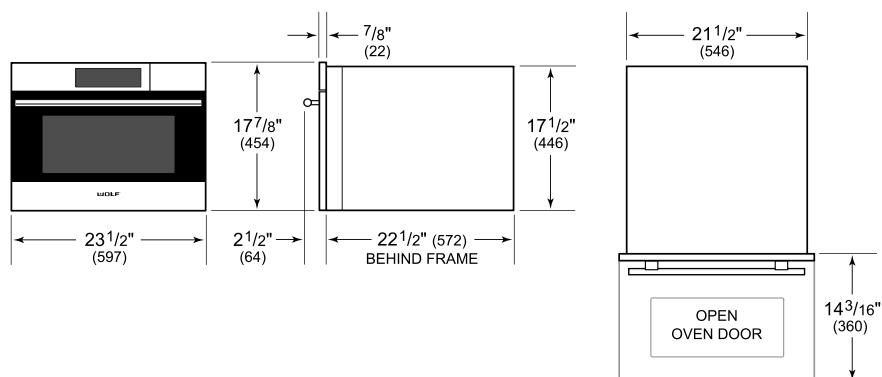

FLUSH INSTALLATION

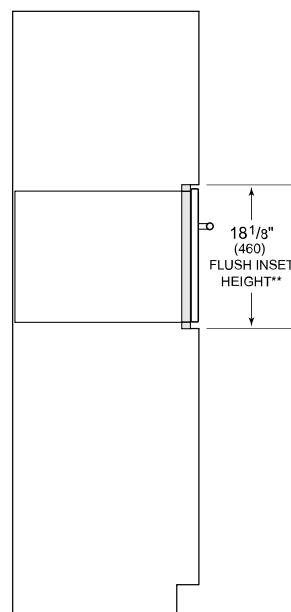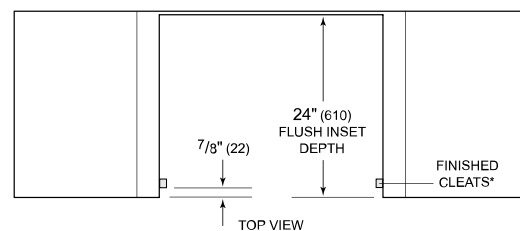

SIDE VIEW

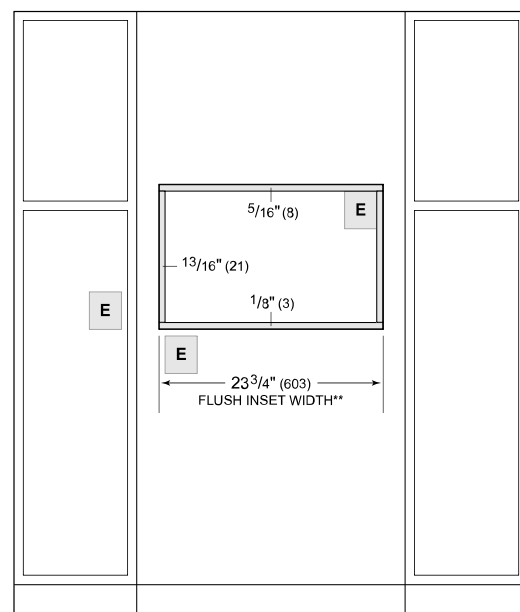

FRONT VIEW

*Will be visible and should be finished to match cabinetry.

**Dimension provides minimum reveals.

NOTE: Location of electrical supply within opening may require additional cabinet depth.