


Installation Guide

Suitable for all Quooker taps and boiling water tanks.

**Do you
need help with
the installation?**

Scan the QR code or visit
quooker.co.uk/instruction-videos
to easily access the installation videos.



Quooker®

Welcome to the Quooker family. Please read this manual before installing. We assume that the user of this manual has basic technical knowledge. If you still have questions after reading this manual, please contact Quooker customer services. Our address and phone number are listed on the back of this manual. You can also find this manual on our website quooker.co.uk.

Practical background information	4
Technical specifications	5
Contents of the package	6
The entire system at a glance	9
Maintenance and service	34
Disconnecting tank	35

Practical background information

The Quooker system consists of a vacuum-insulated tank, which is connected to the water supply under a worktop and connects to the Quooker tap. Your Quooker system can be expanded with a CUBE, a Cold Water Filter, a Scale Control R and/or with accessories such as a Soap Dispenser, a mounting bracket or a Powerswitch. For more information, see our website.

Installation restrictions

For installation, always follow the prescribed method in this manual. The Quooker tap must be connected according to the locally applicable regulations. It is not permitted to connect the Quooker system to a Reverse Osmosis system or a water softener with a pH-reducing action.

Safety

The Quooker tap can be used by children over eight years old and individuals with reduced physical, sensory or mental abilities, but only if they are supervised or have received instructions on the safe use of the appliance. Inform individuals unfamiliar with the Quooker system about safe use and the possible hazards concerned with using the boiling-water tap.

Note: incorrect use could potentially lead to injury or damage to health. Prevent children from using the tap as a toy and do not allow children to clean or maintain the product without supervision. Keep the plug out of reach of small children.

The Quooker system is suitable for domestic use and use in similar situations such as: staff kitchens in stores, offices, farms and other commercial buildings, and by hotels, motels, bed & breakfasts and other residential accommodations.

Avoid spilling water on the plug. Only a qualified technician should replace a defective power supply plug. Before disconnecting, cool the tank off first. The quickest way to do this is by switching off the Quooker tank. Leave the plug in the wall socket. Then operate the boiling-water tap and close it again when the water runs cold. A more detailed explanation for disconnecting the tank can be found on page 35.

You can also find this manual on our website quooker.co.uk.

Technical specifications

Tap	Nordic Single tap	Fusion, Flex and Nordic Mixer tap	Front
Tap hole	32 mm	35 mm	35 mm
Recommended temp. mixing water	Not Applicable	60 °C	60 °C
Tap Base Ring available	yes	yes	no

Tank	PRO3	COMBI	COMBI+
Voltage	230 V	230 V	230 V
Power*	1600 W	2200 W	2200 W
Content	3 litres	7 litres	7 litres
Heating-up time*	15 minutes	20 minutes	20 minutes
Standby power consumption*	10 W	10 W	10 W
Tank height	47 cm	49 cm	49 cm
Required working height	55 cm	57 cm	57 cm
Tank diameter	15 cm	20 cm	20 cm
Minimum water supply pressure	200 kPa (2 bar)	200 kPa (2 bar)	200 kPa (2 bar)
Maximum water supply pressure	600 kPa (6 bar)	600 kPa (6 bar)	600 kPa (6 bar)
Maximum working pressure	800 kPa (8 bar)	800 kPa (8 bar)	800 kPa (8 bar)
Mounting bracket / bracket available	yes	yes	yes
Stop tap	electric		
HiTAC® water filter	High Temperature Activated Carbon		
Safety	maximum temperature		

Energy label of the Quooker COMBI and COMBI+

Stated capacity profile	XXS
Energy efficiency class for water heating	A
Energy efficiency of water heating	36 %
Annual consumption*	515 kWh/year
Hot water temperature setting of water heater	40 – 60 °C

* These values are averages.


According to European laws and regulations regarding the energy efficiency of domestic hot water appliances, the COMBI and COMBI+ tank carry an A-label. PRO3 tanks only supply boiling water. The EU has not established an energy label guideline for boiling water tanks. However, these tanks are just as economical.

Contents of the package Find your tap.

Nordic Single tap <

* Nordic Mixer tap parts


Front

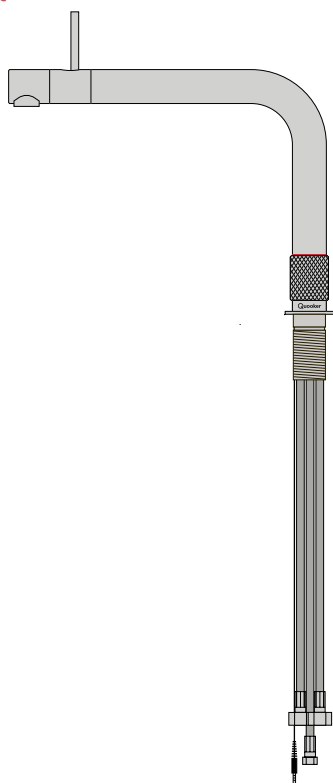


Screws




Metal Washer



Threaded Ring



Aerator Key*




Small Fibre Washer



Tap Hose Screens



















White Tap Support



* The Aerator Key must be used for the removal and installation of the Aerator.

Contents of the package Identify your tank.

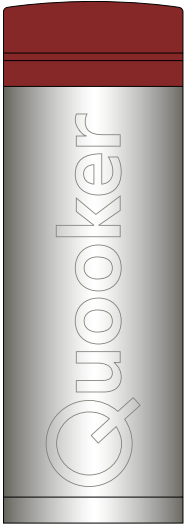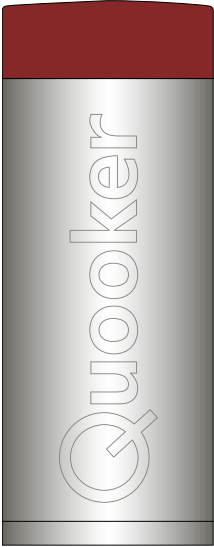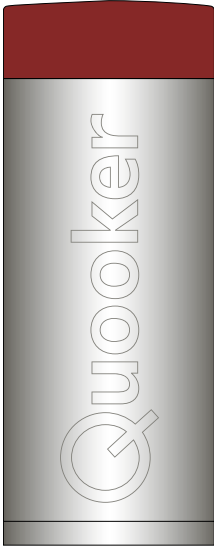
PRO3	COMBI	COMBI+
		
		Tap Tail Adapter 
		Reducing Coupler 
		Mixer Valve including White Check Valve → 
	Brass Check Valve 	Brass Check Valve (do not install)* 
	Mixer Valve 	Black Quooker Reducing Valve 
Tap Tail Adapter 		
Red Quooker Reducing Valve 	Red Quooker Reducing Valve 	Red Quooker Reducing Valve 
Multiple Fibre Washers and Tap Hose Screens** 	Multiple Fibre Washers and Tap Hose Screens** 	Multiple Fibre Washers and Tap Hose Screens** 
Isolation Valve 	Isolation Valve 	Isolation valve 

* The Check Valve does not need to be installed in the installation of a COMBI+.


** When installing, it is not necessary to use all the parts supplied.

The entire system at a glance


Scroll to your tap (top half) and tank (bottom half) to display the installation of your complete system.




Twintaps or Nordic single tap



Fusion




Flex




Front



PRO3

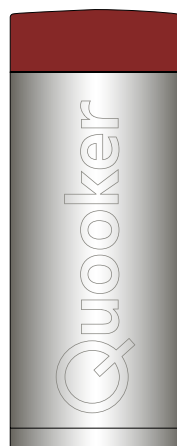

COMBI

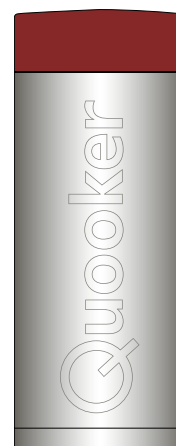

COMBI+

Twintaps or Nordic single tap
with the **PRO3** (p. 10)

Twintaps or Nordic single tap
with the **COMBI** (p. 12)

Twintaps or Nordic single tap
with the **COMBI+** (p. 14)

Fusion with the PRO3
(p. 16)

Fusion with the COMBI
(p. 18)

Fusion with the COMBI+
(p. 20)

Flex with the PRO3
(p. 22)

Flex with the COMBI
(p. 24)

Flex with the COMBI+
(p. 26)

Front with the PRO3
(p. 28)

Front with the COMBI
(p. 30)

Front with the COMBI+
(p. 32)

Twintaps or Nordic Single tap

Additional supplies needed: Cross-Head Screwdriver, Spanners size 12 and 10.

The Nordic Twintaps consist of a Mixer tap and a boiling-water tap. Should you only want to connect a boiling-water tap, skip the steps for the Mixer tap. The names of the parts can also be found in the contents of the package (p. 6).

Installation Nordic Mixer tap (Twintaps)

- In the case of a tap hole greater than 35 mm use an appropriate Tap Base Ring available from Quooker.
- Replace the black plastic fitting at the bottom of the tap with the rubber Gasket, only if there is a 32 mm tap hole in the work surface.
- Screw the supplied Hot & Cold water hose onto the underside of the Mixer tap. Tighten using Spanner 10.
- Insert the tap through the Tap Hole (recommended: Ø 35 mm) in the work surface.

- Put the White Tap Support (only needed for a Stainless Steel sink or thin work surface < 10 mm) and the Horse-shoe-shaped Brass Fixing Plate around the hoses.
- Turn the nut on the thread at the bottom of the tap. Hand-tighten.
- Turn the tap so logo faces front.
- Tighten the Fixing Nut with Spanner 12.

Installation Nordic Single tap (boiling-water tap)

- Only if there is a tap hole of 35 mm or larger in the work surface, place the supplied Centring Ring around the bottom of the tap.
- Insert the tap through the tap hole (recommended: Ø32 mm) in the work surface.
- First place the Metal Washer and then the Threaded Ring around the thread at the bottom of the tap. Hand-tighten.
- Loosely screw the Screws into the Threaded Ring, but do not tighten them yet.
- Turn the tap so the logo faces front.
- Tighten the Screws.

PRO3

Additional supplies needed: Water Pump Pliers, Spanners 12, 14, 19, 22 and 24.


Close the main Stopcock or Isolation Valves. Then follow the 7 steps from the installation overview on the opposite side. The names of the parts can be found in the contents of the package (p. 8). Only the step with the red background has an additional explanation:

- At step 5, use Spanners 12 and 14 to securely tighten the boiling water hose to the tank.

Installation finished? Then follow the next steps:

- Open the boiling-water tap (push-push-turn) and leave it open.
- Open the main Stopcock or Isolation Valves. Open the Red Quooker Reducing Valve and check for leaks.
- Let the water run. Black water will flow out first, this is Activated Carbon from the filter and is harmless. Wait until the water runs clear, then turn off the boiling-water tap.
- Turn on the tank using the Q-switch located on the lid of the tank.
- Wait 15 minutes for the system to heat-up; the LED ring on the tap will then turn off.

The Quooker system is now ready for use.

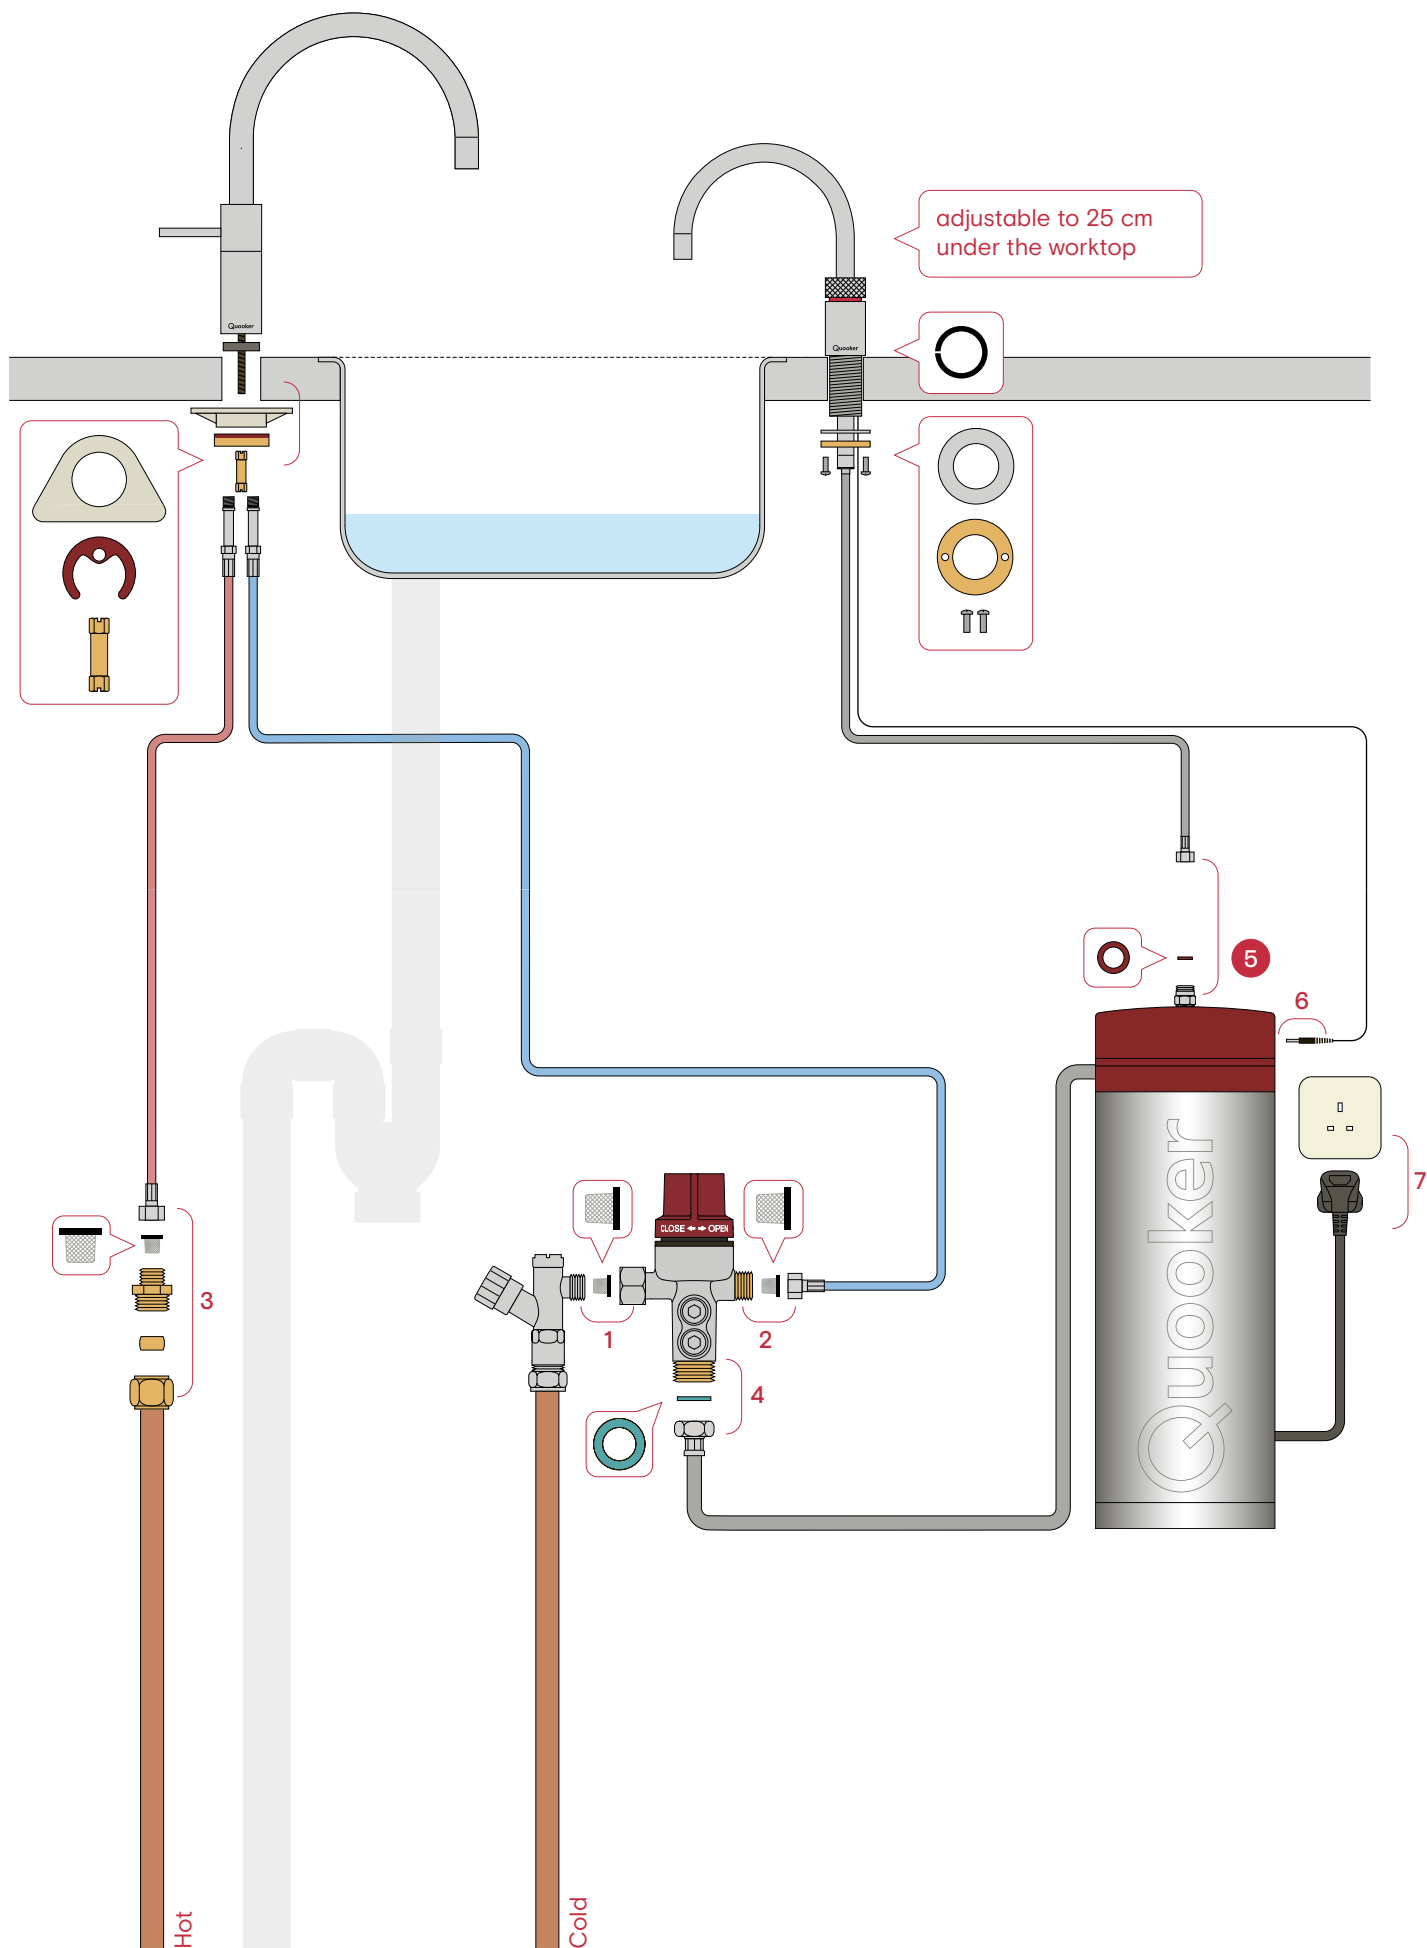

Twintaps or Nordic Single tap

Additional supplies needed: Cross-Head Screwdriver, Spanners size 12 and 10.

The Nordic Twintaps consist of a Mixer tap and a boiling-water tap. Should you only want to connect a boiling-water tap, skip the steps for the Mixer tap. The names of the parts can also be found in the contents of the package (p. 6).

Installation Nordic Mixer tap (Twintaps)

- In the case of a tap hole greater than 35 mm use an appropriate Tap Base Ring available from Quooker.
- Replace the black plastic fitting at the bottom of the tap with the rubber Gasket, only if there is a 32 mm tap hole in the work surface.
- Screw the supplied Hot & Cold water hose onto the underside of the Mixer tap. Tighten using Spanner 10.
- Insert the tap through the Tap Hole (recommended: Ø 35 mm) in the work surface.

- Put the White Tap Support (only needed for a Stainless Steel sink or thin work surface < 10 mm) and the Horse-shoe-shaped Brass Fixing Plate around the hoses.
- Turn the nut on the thread at the bottom of the tap. Hand-tighten.
- Turn the tap so logo faces front.
- Tighten the Fixing Nut with Spanner 12.

Installation Nordic Single tap (boiling-water tap)


- Only if there is a tap hole of 35 mm or larger in the work surface, place the supplied Centring Ring around the bottom of the tap.
- Insert the tap through the tap hole (recommended: Ø32 mm) in the work surface.
- First place the Metal Washer and then the Threaded Ring around the thread at the bottom of the tap. Hand-tighten.
- Loosely screw the Screws into the Threaded Ring, but do not tighten them yet.
- Turn the tap so the logo faces front.
- Tighten the Screws.

COMBI

Additional supplies needed: Water Pump Pliers, Spanner 12, 14, 17, 19, 22 and 24.

Close the main Stopcock or Isolation Valve. Then follow the 10 steps from the installation overview on the opposite side. The names of the parts can be found in the contents of the package (p. 8). Only the steps with a red background have and additional explanation:

- At step 3, make sure that the temperature setting knob on the Mixer Valve remains accessible. This knob allows you to set the temperature of the Hot water (between K-40 °C and W-60 °C).




- In steps 5, 6 and 7, the connections are fitted with compression fittings so no Gasket or Washers are needed between them.
- At step 8, use Spanners 12 and 14 to securely tighten the boiling water hose to the tank.

Installation finished? Then follow the next steps:

- Open the boiling-water tap (push-push-turn) and leave it open.
- Open the main Stopcock or Isolation Valves. Open the Red Quooker Reducing Valve and check for leaks.
- Let the water run. Black water will flow out first, this is Activated Carbon from the filter and is harmless. Wait until the water runs clear, then turn off the boiling-water tap.
- Turn on the tank using the Q-switch located on the lid of the tank.
- Wait 20 minutes for the system to heat-up; the LED ring on the tap will then turn off.

The Quooker system is now ready for use.

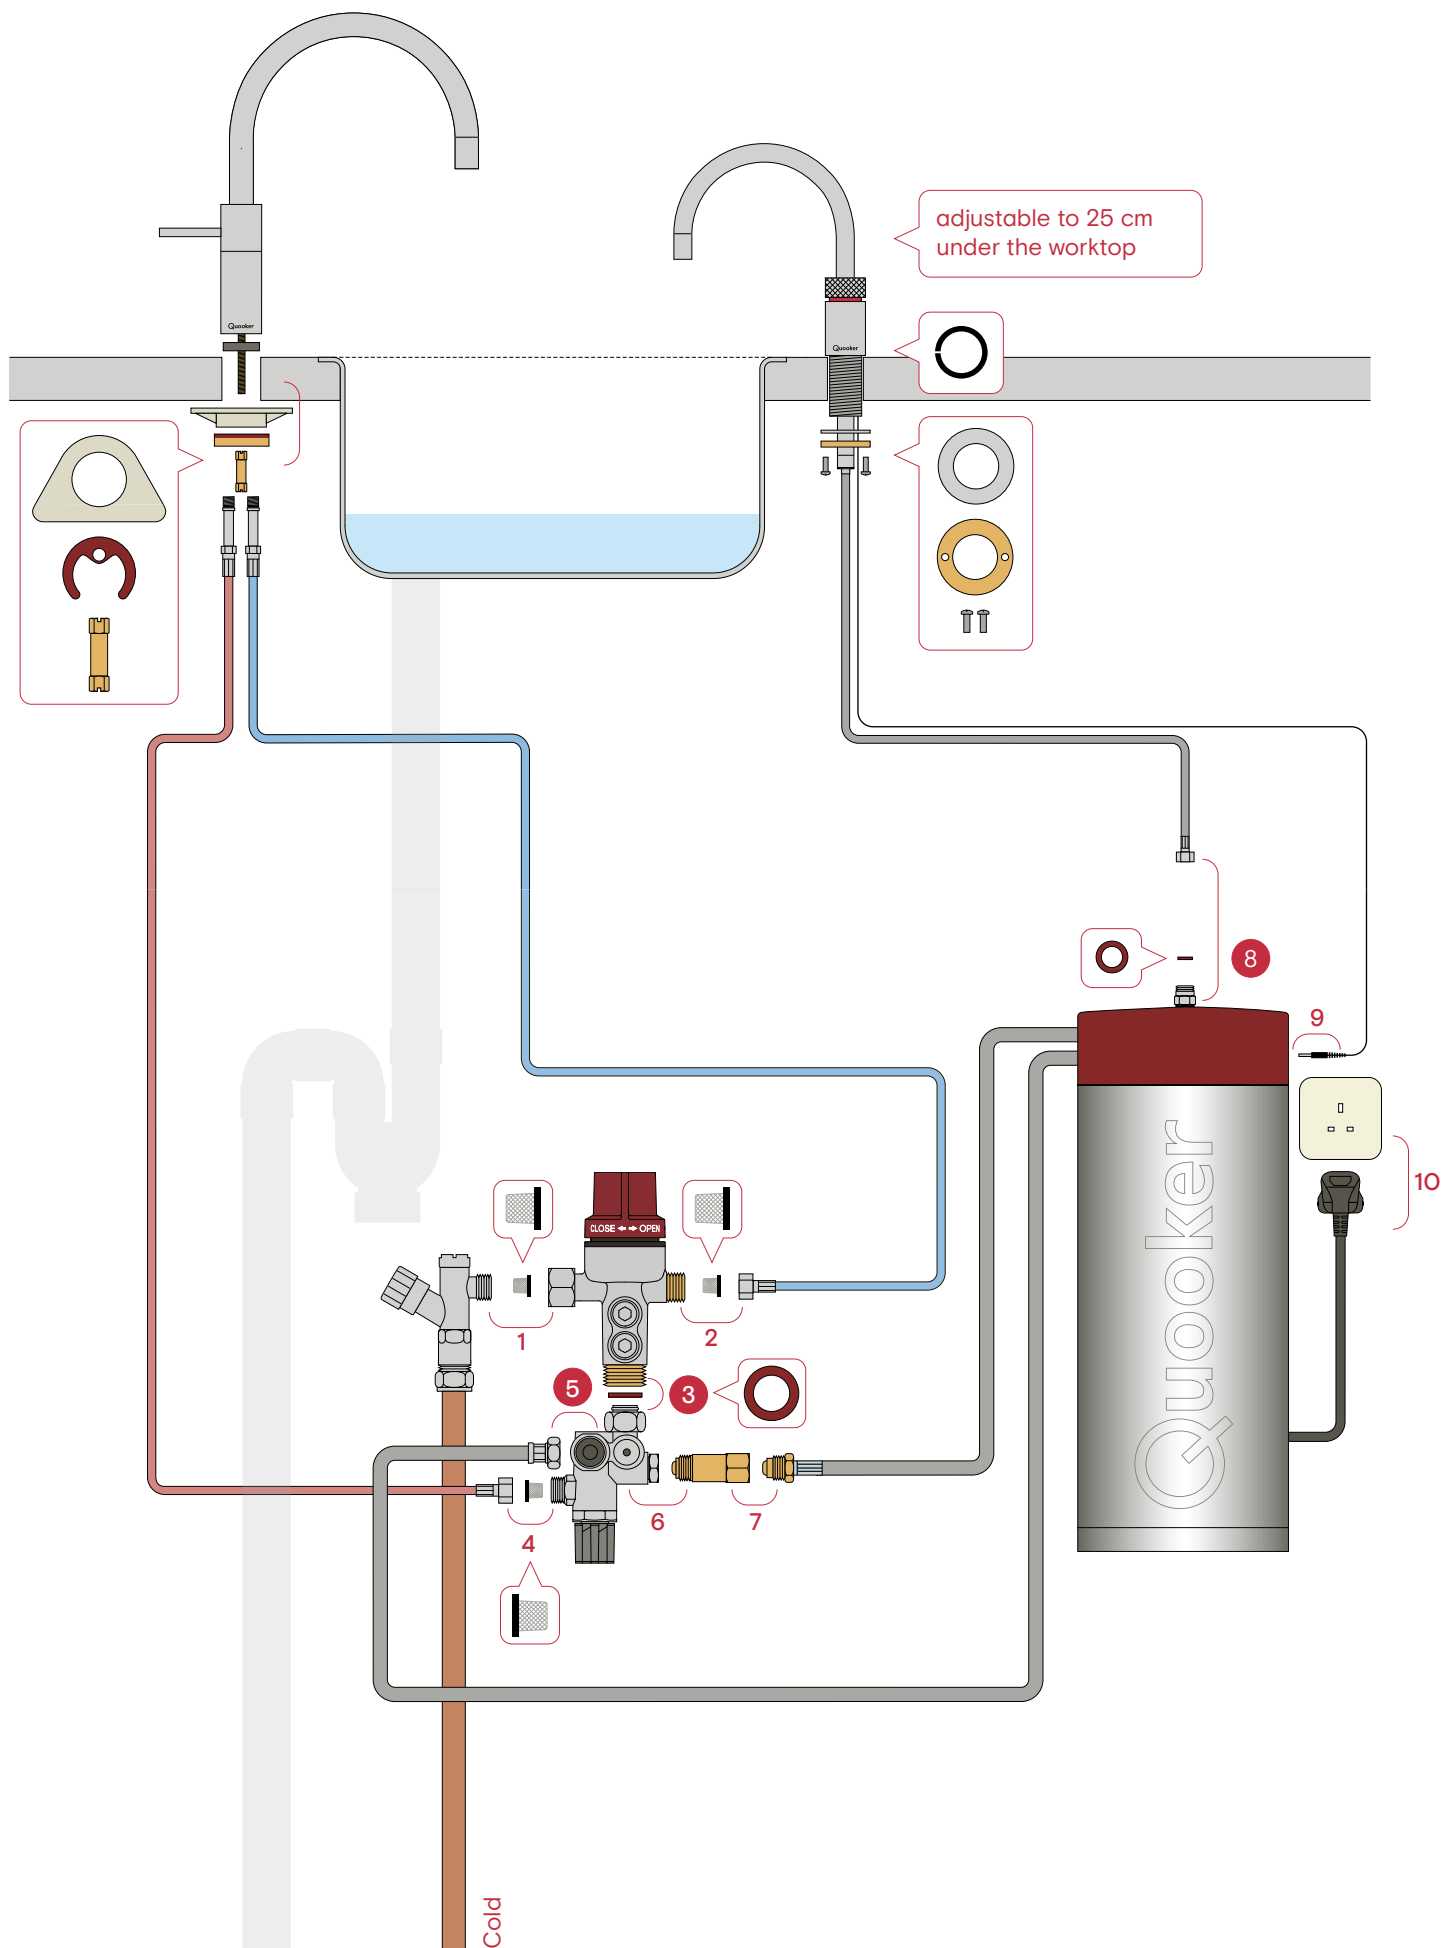

Twintaps or Nordic Single tap

Additional supplies needed: Cross-Head Screwdriver, Spanners size 12 and 10.

The Nordic Twintaps consist of a Mixer tap and a boiling-water tap. Should you only want to connect a boiling-water tap, skip the steps for the Mixer tap. The names of the parts can also be found in the contents of the package (p. 6).

Installation Nordic Mixer tap (Twintaps)

- In the case of a tap hole greater than 35 mm use an appropriate Tap Base Ring available from Quooker.
- Replace the black plastic fitting at the bottom of the tap with the rubber Gasket, only if there is a 32 mm tap hole in the work surface.
- Screw the supplied Hot & Cold water hose onto the underside of the Mixer tap. Tighten using Spanner 10.
- Insert the tap through the Tap Hole (recommended: Ø 35 mm) in the work surface.

- Put the White Tap Support (only needed for a Stainless Steel sink or thin work surface < 10 mm) and the Horse-shoe-shaped Brass Fixing Plate around the hoses.
- Turn the nut on the thread at the bottom of the tap. Hand-tighten.
- Turn the tap so logo faces front.
- Tighten the Fixing Nut with Spanner 12.

Installation Nordic Single tap (boiling-water tap)


- Only if there is a tap hole of 35 mm or larger in the work surface, place the supplied Centring Ring around the bottom of the tap.
- Insert the tap through the tap hole (recommended: Ø 32 mm) in the work surface.
- First place the Metal Washer and then the Threaded Ring around the thread at the bottom of the tap. Hand-tighten.
- Loosely screw the Screws into the Threaded Ring, but do not tighten them yet.
- Turn the tap so the logo faces front.
- Tighten the Screws.

COMBI+

Additional supplies needed: Water Pump Pliers, Spanner 12, 14, 17, 19, 22 and 24.

Close the main Stopcock or Isolation Valves. Then follow the 11 steps from the installation overview on the opposite side. The names of the parts can be found in the contents of the package (p. 8). Only the steps with a red background have and additional explanation:

- At step 5, make sure that the temperature setting knob on the Mixer Valve remains accessible. This knob allows you to set the temperature of the Hot water (between K-40 °C and W-60 °C).




- In steps 6 and 8, the connections are fitted with compression fittings so no Gasket or Washers are needed between them.
- At step 9, use Spanners 12 and 14 to securely tighten the boiling water hose to the tank.

Installation finished? Then follow the next steps:

- Open the boiling-water tap (push-push-turn) and leave it open.
- Open the main Stopcock or Isolation Valves. Open the Black and Red Quooker Reducing Valves and check for leaks.
- Let the water run. Black water will flow out first, this is Activated Carbon from the filter and is harmless. Wait until the water runs clear, then turn off the boiling-water tap.
- Turn on the tank using the Q-switch located on the lid of the tank.
- Wait 20 minutes for the system to heat-up; the LED ring on the tap will then turn off.

The Quooker system is now ready for use.

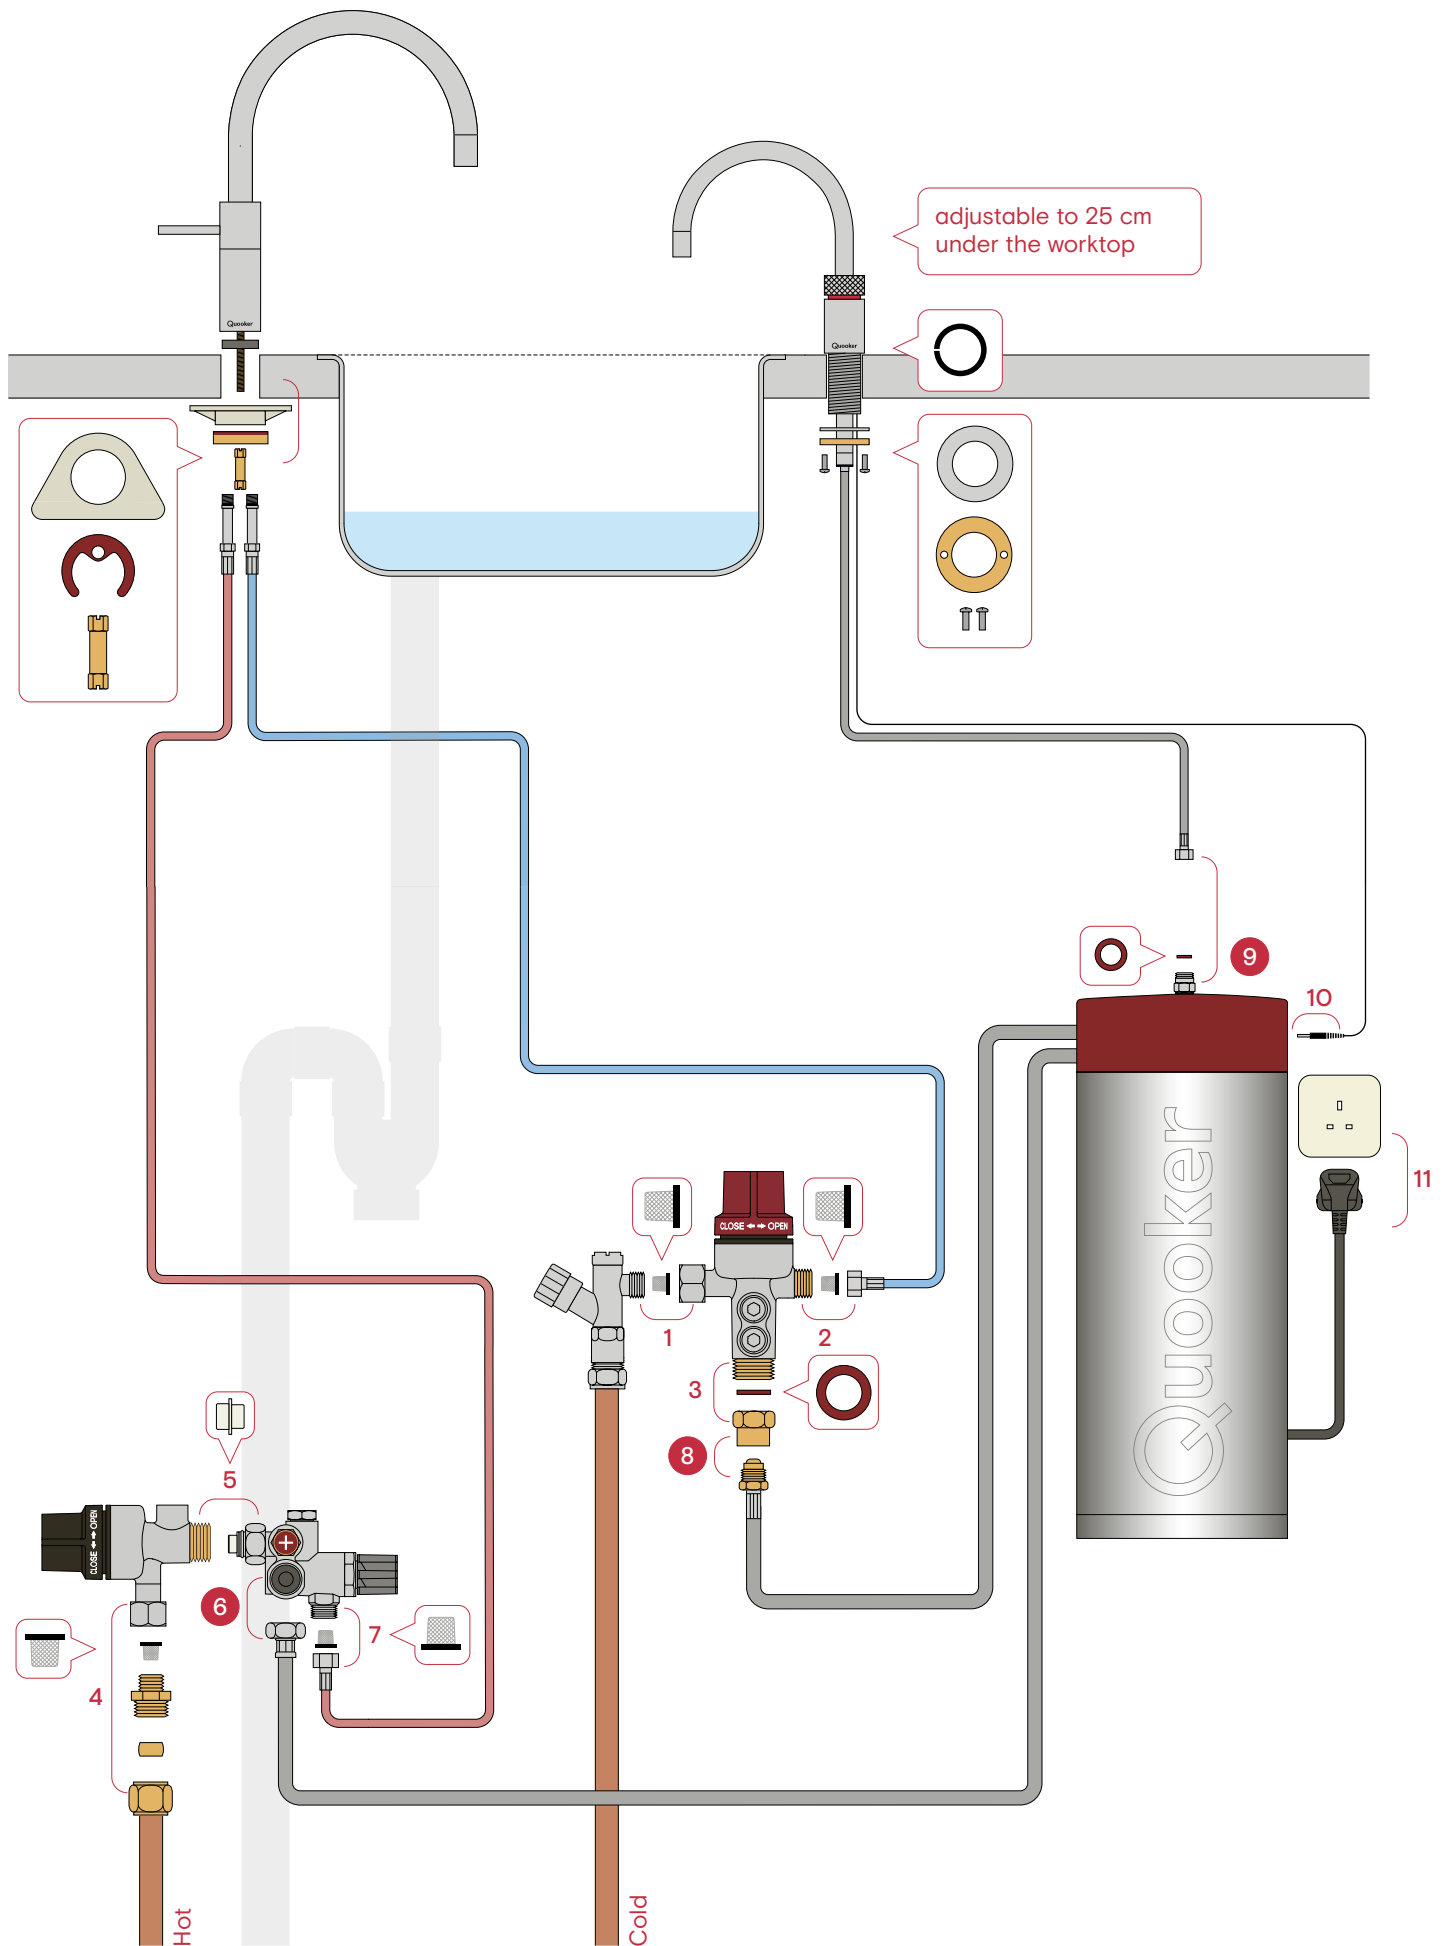

Fusion

Additional supplies needed: Spanners size 12 and 10.

Follow these steps to connect the Fusion.

The names of the parts can also be found in the contents of the package (p.6).

- Screw the supplied Hot & Cold water hoses into the bottom of the Fusion. Tighten using Spanner 10.
- Insert the tap through the tap hole (Ø 35mm) in the work surface.
- Put the White Tap Support (only needed for a Stainless Steel sink or thin work surface < 10 mm) and the Horseshoe-shaped Brass Fixing Plate around the hoses.
- Place the Fixing Nut on the thread at the bottom of the tap. Hand-tighten.
- Turn the tap so the logo faces front.
- Tighten the Fixing nut with Spanner 12.

PRO3

Additional supplies needed: Water Pump Pliers, Spanners 12, 14, 19, 22 and 24.


Close the main Stopcock or Isolation Valves. Then follow the 7 steps from the installation overview on the opposite side. The names of the parts can be found in the contents of the package (p. 8). Only the step with the red background has an additional explanation:

- At step 5, use Spanners 12 and 14 to securely tighten the boiling water hose to the tank.

Installation finished? Then follow the next steps:

- Open the boiling-water tap (push-push-turn) and leave it open.
- Open the main Stopcock or Isolation Valves. Open the Red Quooker Reducing Valve and check for leaks.
- Let the water run. Black water will flow out first, this is Activated Carbon from the filter and is harmless. Wait until the water runs clear, then turn off the boiling-water tap.
- Turn on the tank using the Q-switch located on the lid of the tank.
- Wait 15 minutes for the system to heat-up; the LED ring on the tap will then turn off.

The Quooker system is now ready for use.

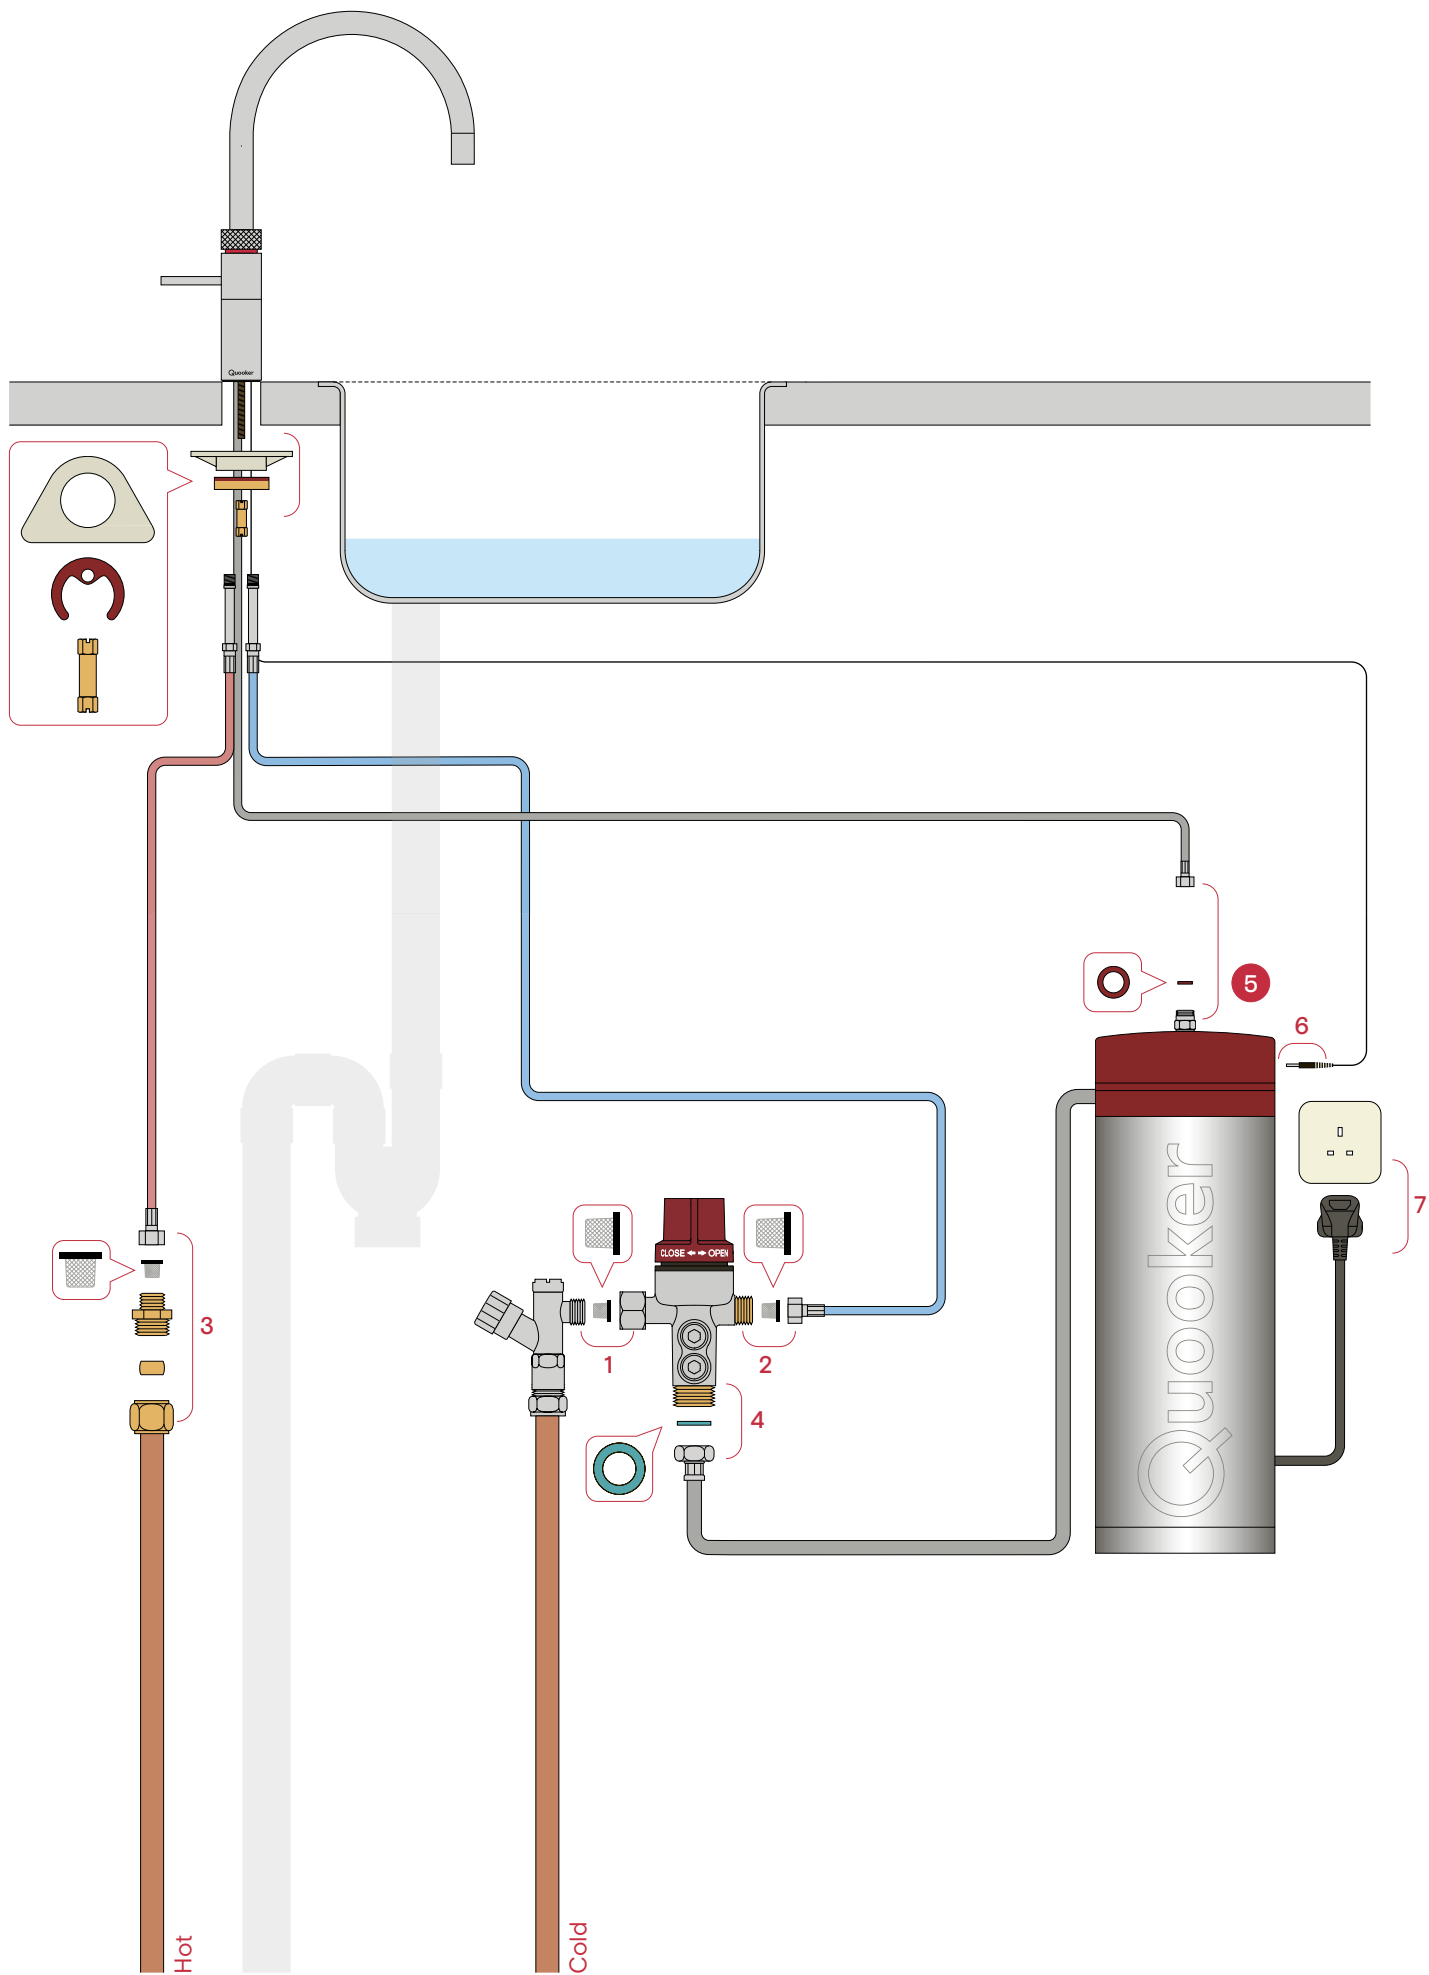

Fusion

Additional supplies needed: Spanners size 12 and 10.

Follow these steps to connect the Fusion.

The names of the parts can also be found in the contents of the package (p.6).


- Screw the supplied Hot & Cold water hoses into the bottom of the Fusion. Tighten using Spanner 10.
- Insert the tap through the tap hole (Ø 35mm) in the work surface.
- Put the White Tap Support (only needed for a Stainless Steel sink or thin work surface < 10 mm) and the Horseshoe-shaped Brass Fixing Plate around the hoses.
- Place the Fixing Nut on the thread at the bottom of the tap. Hand-tighten.
- Turn the tap so the logo faces front.
- Tighten the Fixing nut with Spanner 12.

COMBI

Additional supplies needed: Water Pump Pliers, Spanner 12, 14, 17, 19, 22 and 24.

Close the main Stopcock or Isolation Valve. Then follow the 10 steps from the installation overview on the opposite side. The names of the parts can be found in the contents of the package (p. 8). Only the steps with a red background have and additional explanation:

- At step 3, make sure that the temperature setting knob on the Mixer Valve remains accessible. This knob allows you to set the temperature of the Hot water (between K-40 °C and W-60 °C).




- In steps 5, 6 and 7, the connections are fitted with compression fittings so no Gasket or Washers are needed between them.
- At step 8, use Spanners 12 and 14 to securely tighten the boiling water hose to the tank.

Installation finished? Then follow the next steps:

- Open the boiling-water tap (push-push-turn) and leave it open.
- Open the main Stopcock or Isolation Valves. Open the Red Quooker Reducing Valve and check for leaks.
- Let the water run. Black water will flow out first, this is Activated Carbon from the filter and is harmless. Wait until the water runs clear, then turn off the boiling-water tap.
- Turn on the tank using the Q-switch located on the lid of the tank.
- Wait 20 minutes for the system to heat-up; the LED ring on the tap will then turn off.

The Quooker system is now ready for use.

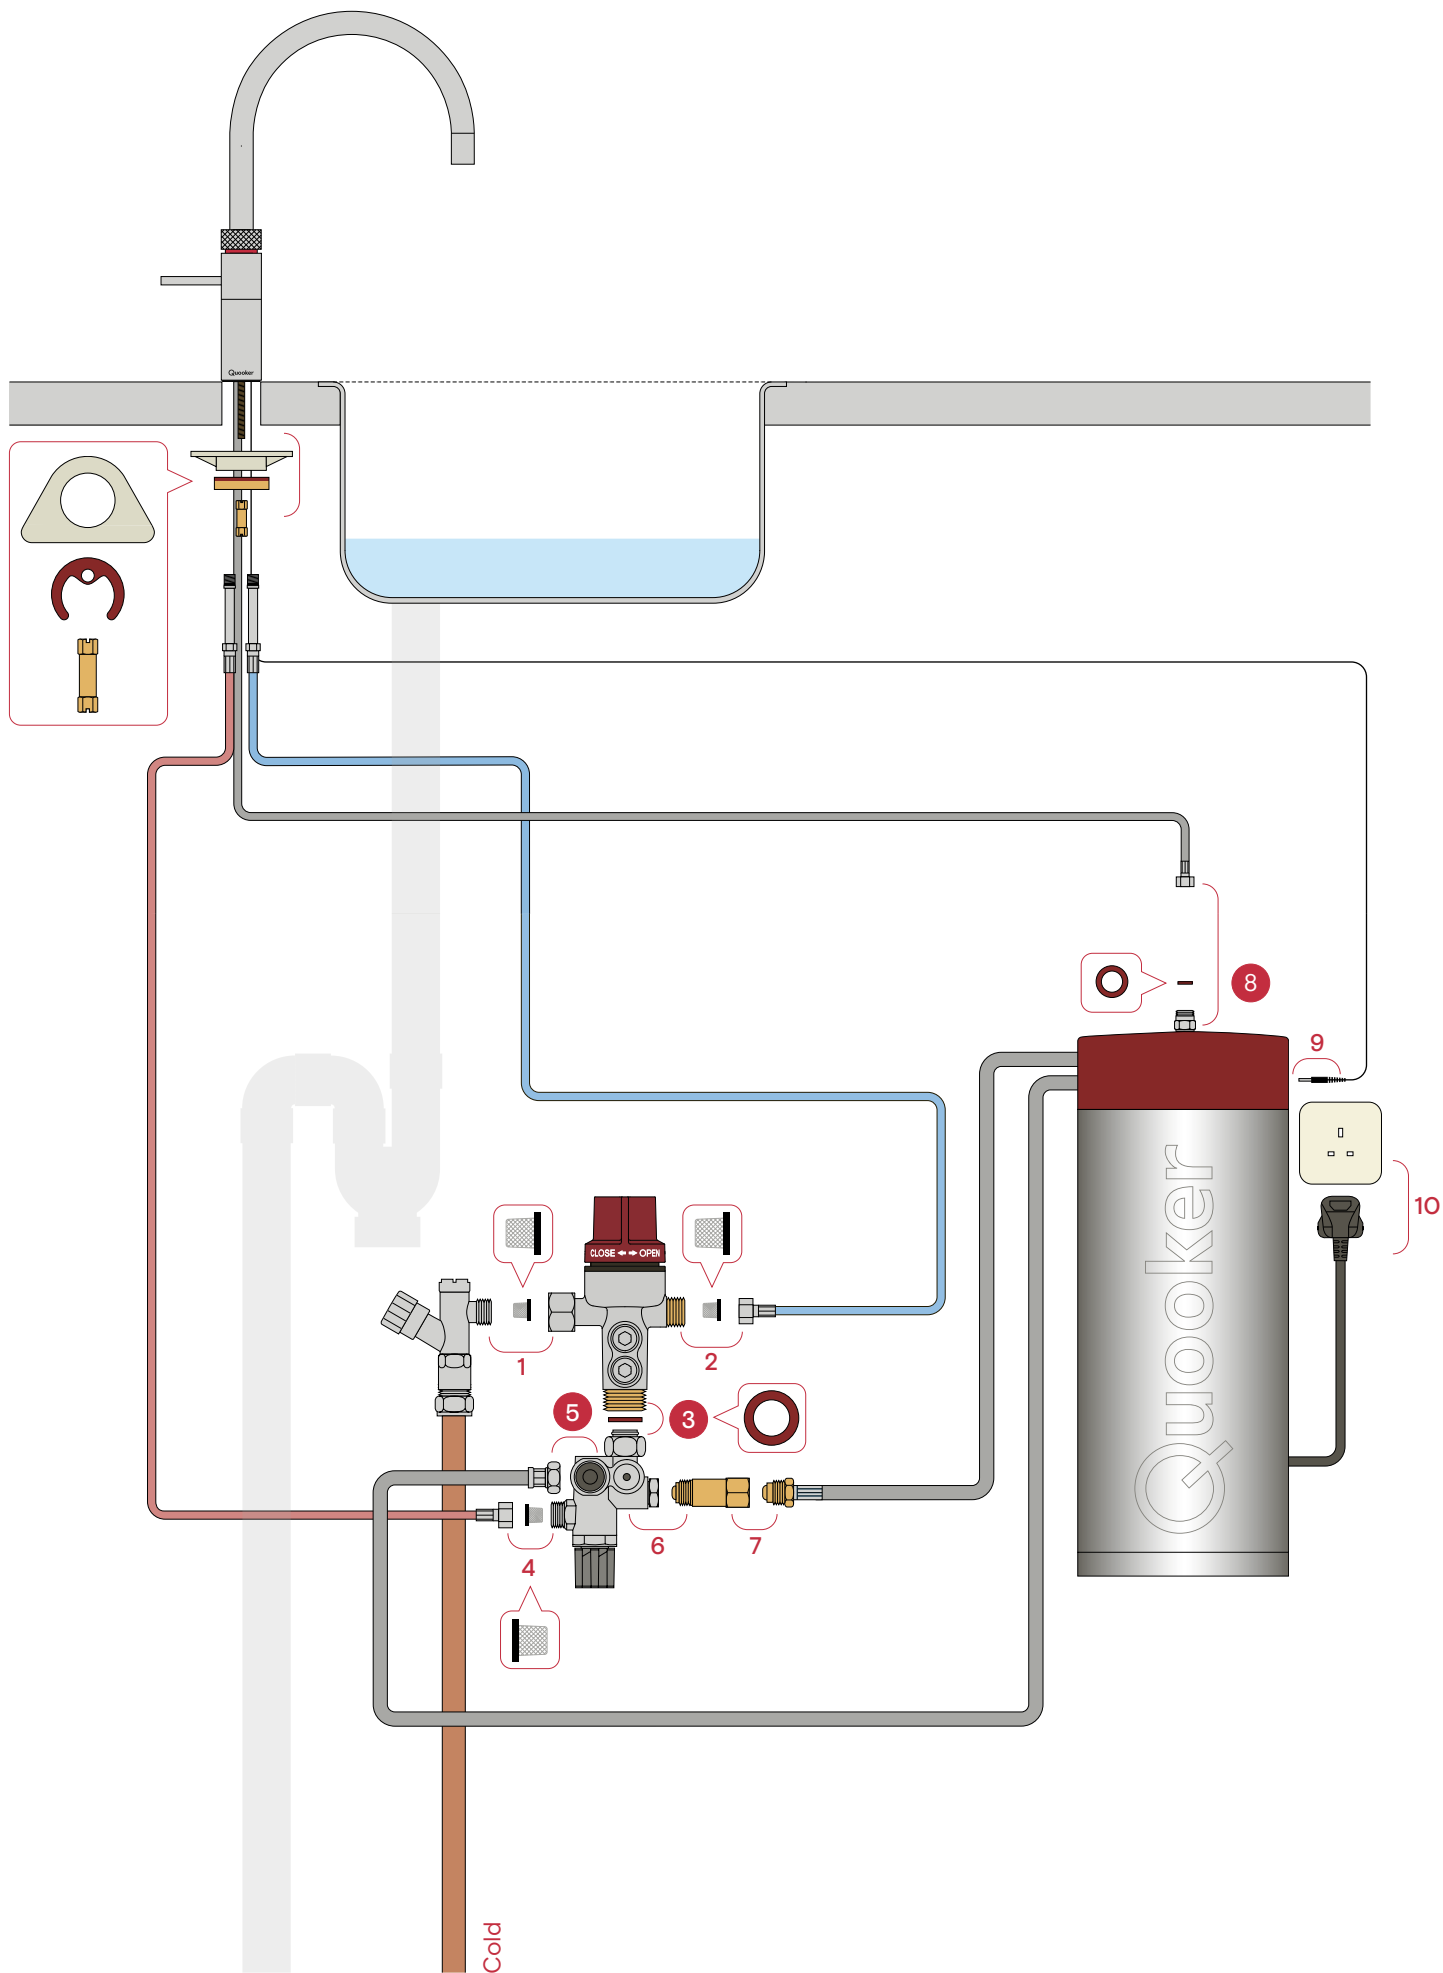

Fusion

Additional supplies needed: Spanners size 12 and 10.

Follow these steps to connect the Fusion.

The names of the parts can also be found in the contents of the package (p.6).


- Screw the supplied Hot & Cold water hoses into the bottom of the Fusion. Tighten using Spanner 10.
- Insert the tap through the tap hole (Ø 35mm) in the work surface.
- Put the White Tap Support (only needed for a Stainless Steel sink or thin work surface < 10 mm) and the Horseshoe-shaped Brass Fixing Plate around the hoses.
- Place the Fixing Nut on the thread at the bottom of the tap. Hand-tighten.
- Turn the tap so the logo faces front.
- Tighten the Fixing nut with Spanner 12.

COMBI+

Additional supplies needed: Water Pump Pliers, Spanner 12, 14, 17, 19, 22 and 24.

Close the main Stopcock or Isolation Valves. Then follow the 11 steps from the installation overview on the opposite side. The names of the parts can be found in the contents of the package (p. 8). Only the steps with a red background have and additional explanation:

- At step 5, make sure that the temperature setting knob on the Mixer Valve remains accessible. This knob allows you to set the temperature of the Hot water (between K-40 °C and W-60 °C).




- In steps 6 and 8, the connections are fitted with compression fittings so no Gasket or Washers are needed between them.
- At step 9, use Spanners 12 and 14 to securely tighten the boiling water hose to the tank.

Installation finished? Then follow the next steps:

- Open the boiling-water tap (push-push-turn) and leave it open.
- Open the main Stopcock or Isolation Valves. Open the Black and Red Quooker Reducing Valves and check for leaks.
- Let the water run. Black water will flow out first, this is Activated Carbon from the filter and is harmless. Wait until the water runs clear, then turn off the boiling-water tap.
- Turn on the tank using the Q-switch located on the lid of the tank.
- Wait 20 minutes for the system to heat-up; the LED ring on the tap will then turn off.

The Quooker system is now ready for use.

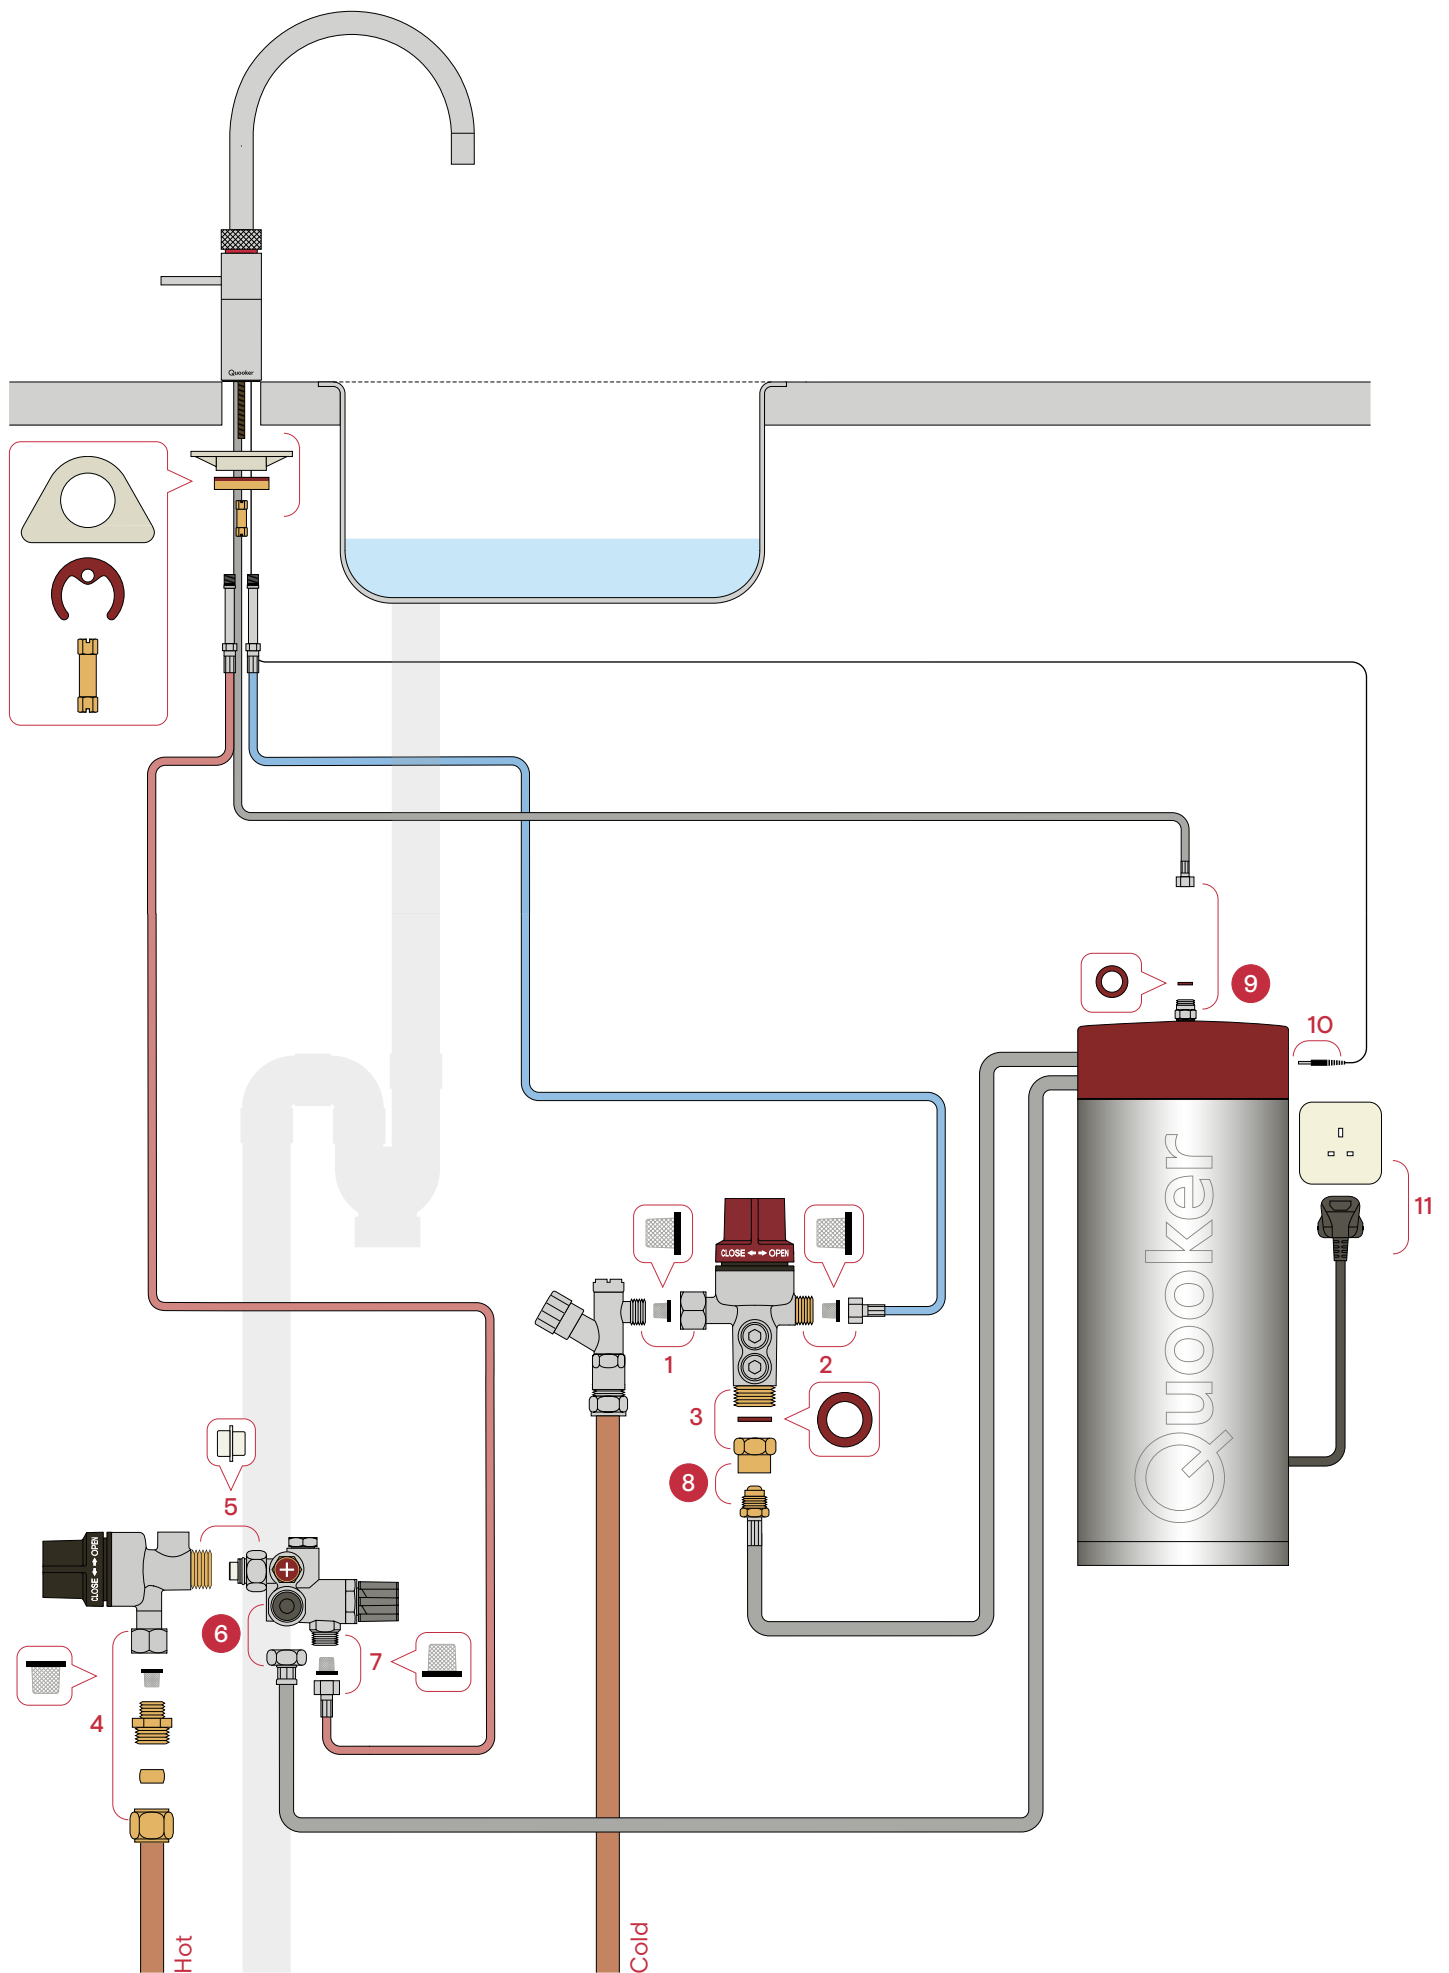

Flex

Additional supplies needed: Cross-Head Screwdriver, Spanner 10 and 12.

Follow these steps to connect the Flex.

The names of the parts can also be found in the contents of the package (p.6).

- Screw the supplied Hot & Cold water hoses into the tap pipes on the underside of the Flex. Tighten using Spanner 10.
- Screw the supplied black Mixer Hose onto the remaining tap pipe on the underside of the Flex. Tighten using Spanner 12.
- Carefully bend the tap pipes together and insert the tap through the tap hole (35 mm) in the work surface.
Tip: if the tap is difficult to push through the tap hole, carefully extract the Pull-out Hose from the spout until it just barely protrudes from the bottom of the tap's screw thread. Do not pull the hose too far out of the spout. If this does happen, push the hose back with a rotating motion. This may take several attempts.

- Attach the White Tap Support (only necessary for Stainless Steel sinks or work surface that is < 10 mm thick), the Metal Washer and then the Threaded Ring on the underside of the tap, and tighten.
- Insert the Screws into the Threaded Ring and tighten them loosely.
- Turn the tap so the logo faces front.
- Now tighten the Screws tightly with a screwdriver.
- Now push both black hoses into the Counterweight as shown below. The hoses are correctly attached when there is barely any brass visible on the pipe connections.

Loosening the Counterweight: If necessary, the Counterweight can be detached using the supplied Quick-Release Tool. Press the Release Tool flat against the coupling to hold it still. This allows the hose to be pulled-out.

PRO3

Additional supplies needed: Water Pump Pliers, Spanners 12, 14, 19, 22 and 24.


Close the main Stopcock or Isolation Valves. Then follow the 7 steps from the installation overview on the opposite side. The names of the parts can be found in the contents of the package (p. 8). Only the step with the red background has an additional explanation:

- At step 5, use Spanners 12 and 14 to securely tighten the boiling water hose to the tank.

Installation finished? Then follow the next steps:

- Open the boiling-water tap (push-push-turn) and leave it open.
- Open the main Stopcock or Isolation Valves. Open the Red Quooker Reducing Valve and check for leaks.
- Let the water run. Black water will flow out first, this is Activated Carbon from the filter and is harmless. Wait until the water runs clear, then turn off the boiling-water tap.
- Turn on the tank using the Q-switch located on the lid of the tank.
- Wait 15 minutes for the system to heat-up; the LED ring on the tap will then turn off.

The Quooker system is now ready for use.

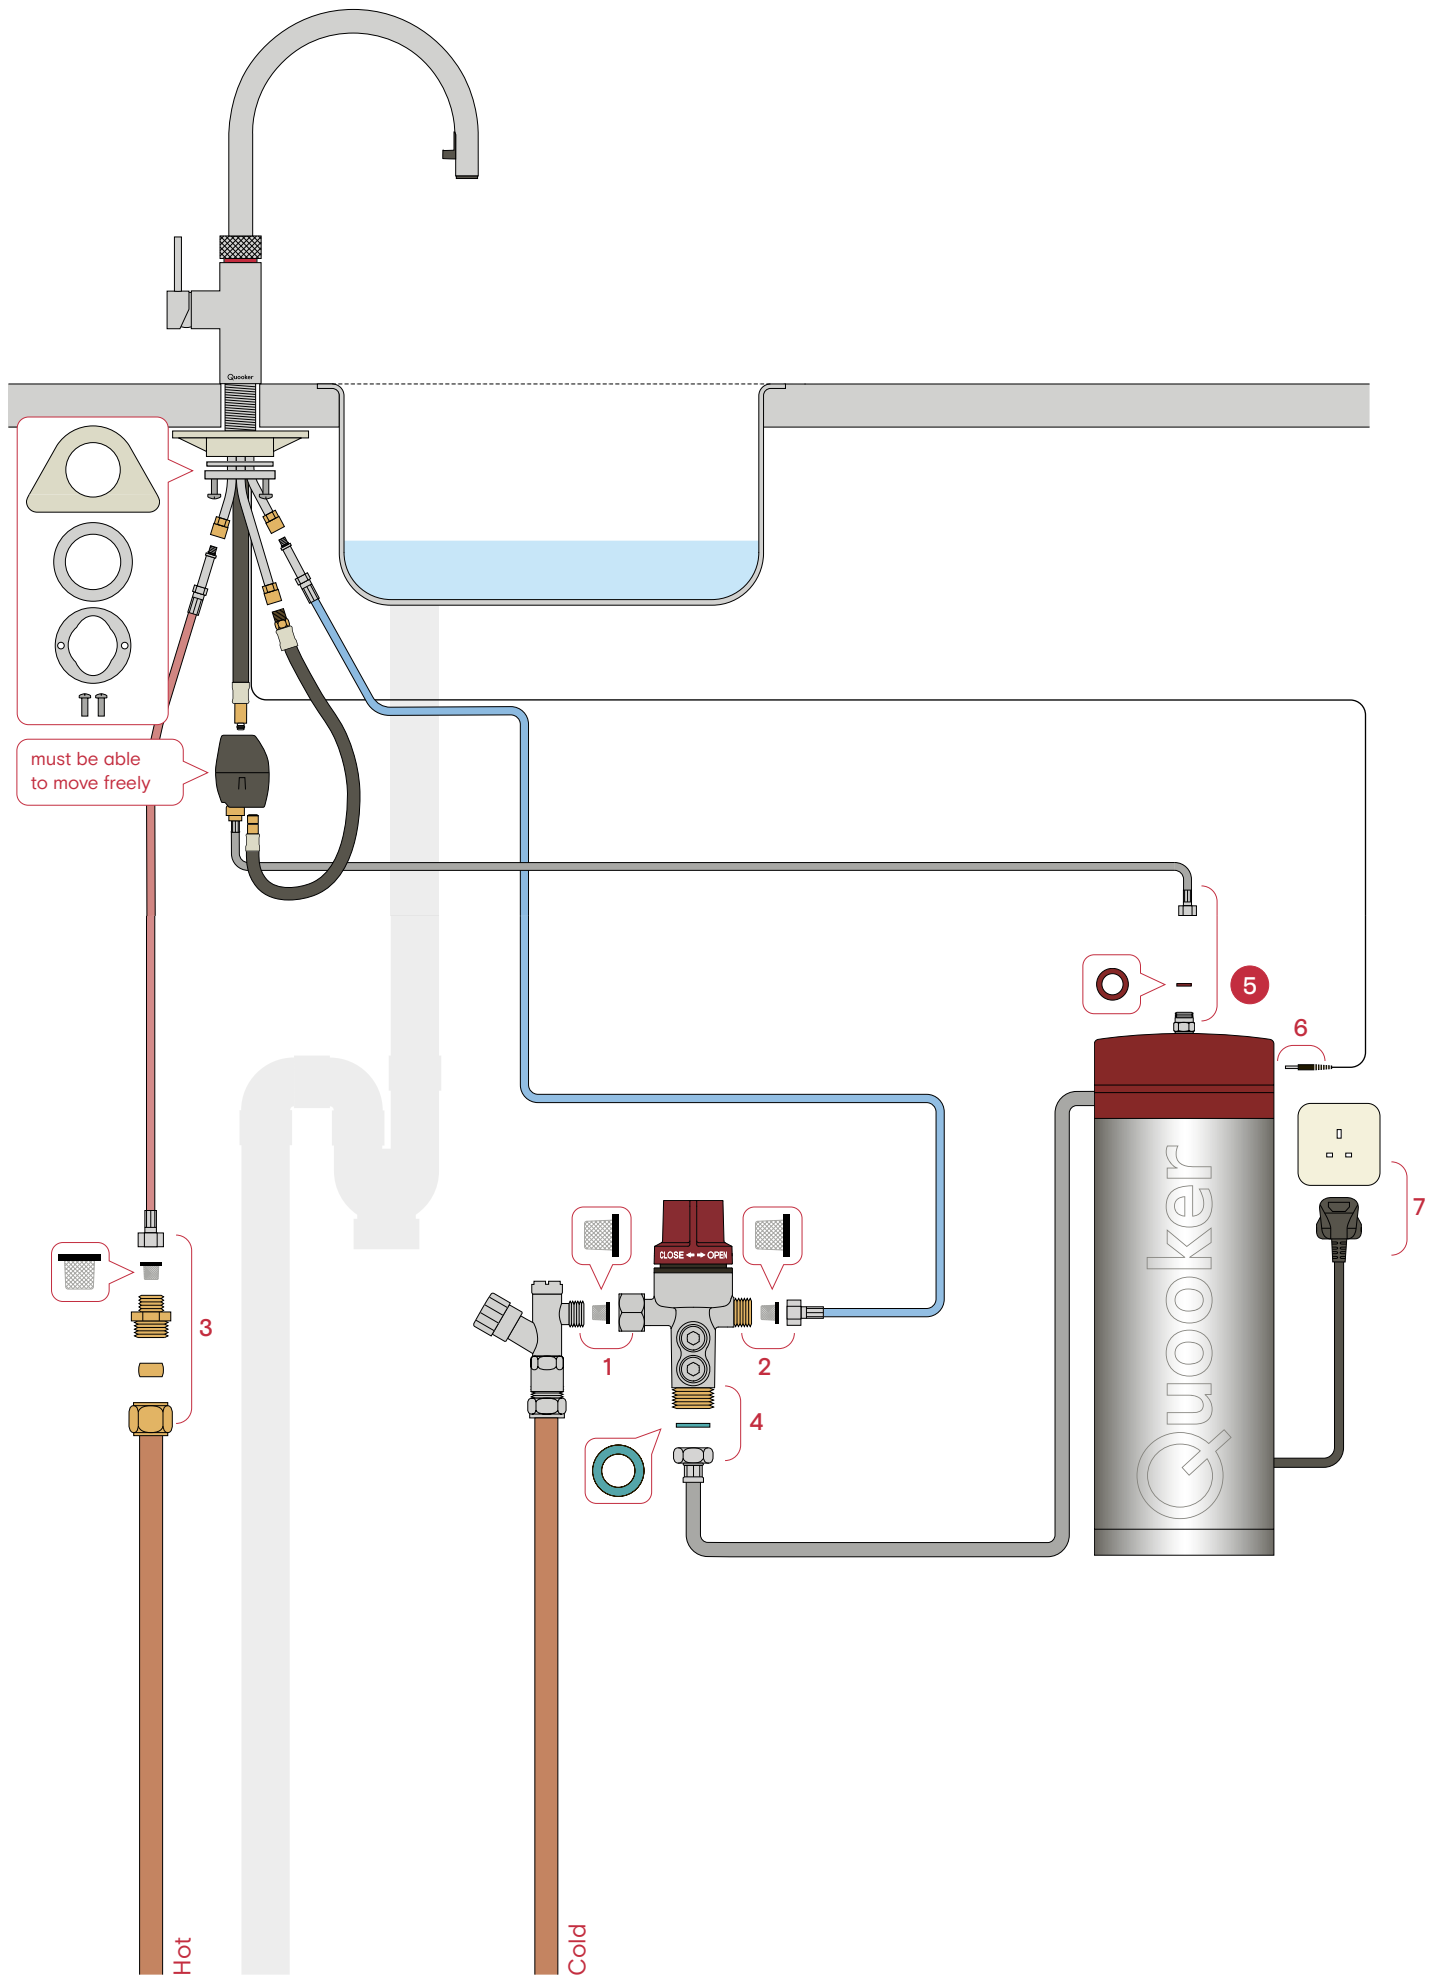

Flex

Additional supplies needed: Cross-Head Screwdriver, Spanner 10 and 12.

Follow these steps to connect the Flex.

The names of the parts can also be found in the contents of the package (p.6).

- Screw the supplied Hot & Cold water hoses into the tap pipes on the underside of the Flex. Tighten using Spanner 10.
- Screw the supplied black Mixer Hose onto the remaining tap pipe on the underside of the Flex. Tighten using Spanner 12.
- Carefully bend the tap pipes together and insert the tap through the tap hole (35 mm) in the work surface.
Tip: if the tap is difficult to push through the tap hole, carefully extract the Pull-out Hose from the spout until it just barely protrudes from the bottom of the tap's screw thread. Do not pull the hose too far out of the spout. If this does happen, push the hose back with a rotating motion. This may take several attempts.

- Attach the White Tap Support (only necessary for Stainless Steel sinks or work surface that is < 10 mm thick), the Metal Washer and then the Threaded Ring on the underside of the tap, and tighten.
- Insert the Screws into the Threaded Ring and tighten them loosely.
- Turn the tap so the logo faces front.
- Now tighten the Screws tightly with a screwdriver.
- Now push both black hoses into the Counterweight as shown below. The hoses are correctly attached when there is barely any brass visible on the pipe connections.


Loosening the Counterweight: If necessary, the Counterweight can be detached using the supplied Quick-Release Tool. Press the Release Tool flat against the coupling to hold it still. This allows the hose to be pulled-out.

COMBI

Additional supplies needed: Water Pump Pliers, Spanner 12, 14, 17, 19, 22 and 24.

Close the main Stopcock or Isolation Valve. Then follow the 10 steps from the installation overview on the opposite side. The names of the parts can be found in the contents of the package (p. 8). Only the steps with a red background have and additional explanation:

- At step 3, make sure that the temperature setting knob on the Mixer Valve remains accessible. This knob allows you to set the temperature of the Hot water (between K-40 °C and W-60 °C).




- In steps 5, 6 and 7, the connections are fitted with compression fittings so no Gasket or Washers are needed between them.
- At step 8, use Spanners 12 and 14 to securely tighten the boiling water hose to the tank.

Installation finished? Then follow the next steps:

- Open the boiling-water tap (push-push-turn) and leave it open.
- Open the main Stopcock or Isolation Valves. Open the Red Quooker Reducing Valve and check for leaks.
- Let the water run. Black water will flow out first, this is Activated Carbon from the filter and is harmless. Wait until the water runs clear, then turn off the boiling-water tap.
- Turn on the tank using the Q-switch located on the lid of the tank.
- Wait 20 minutes for the system to heat-up; the LED ring on the tap will then turn off.

The Quooker system is now ready for use.

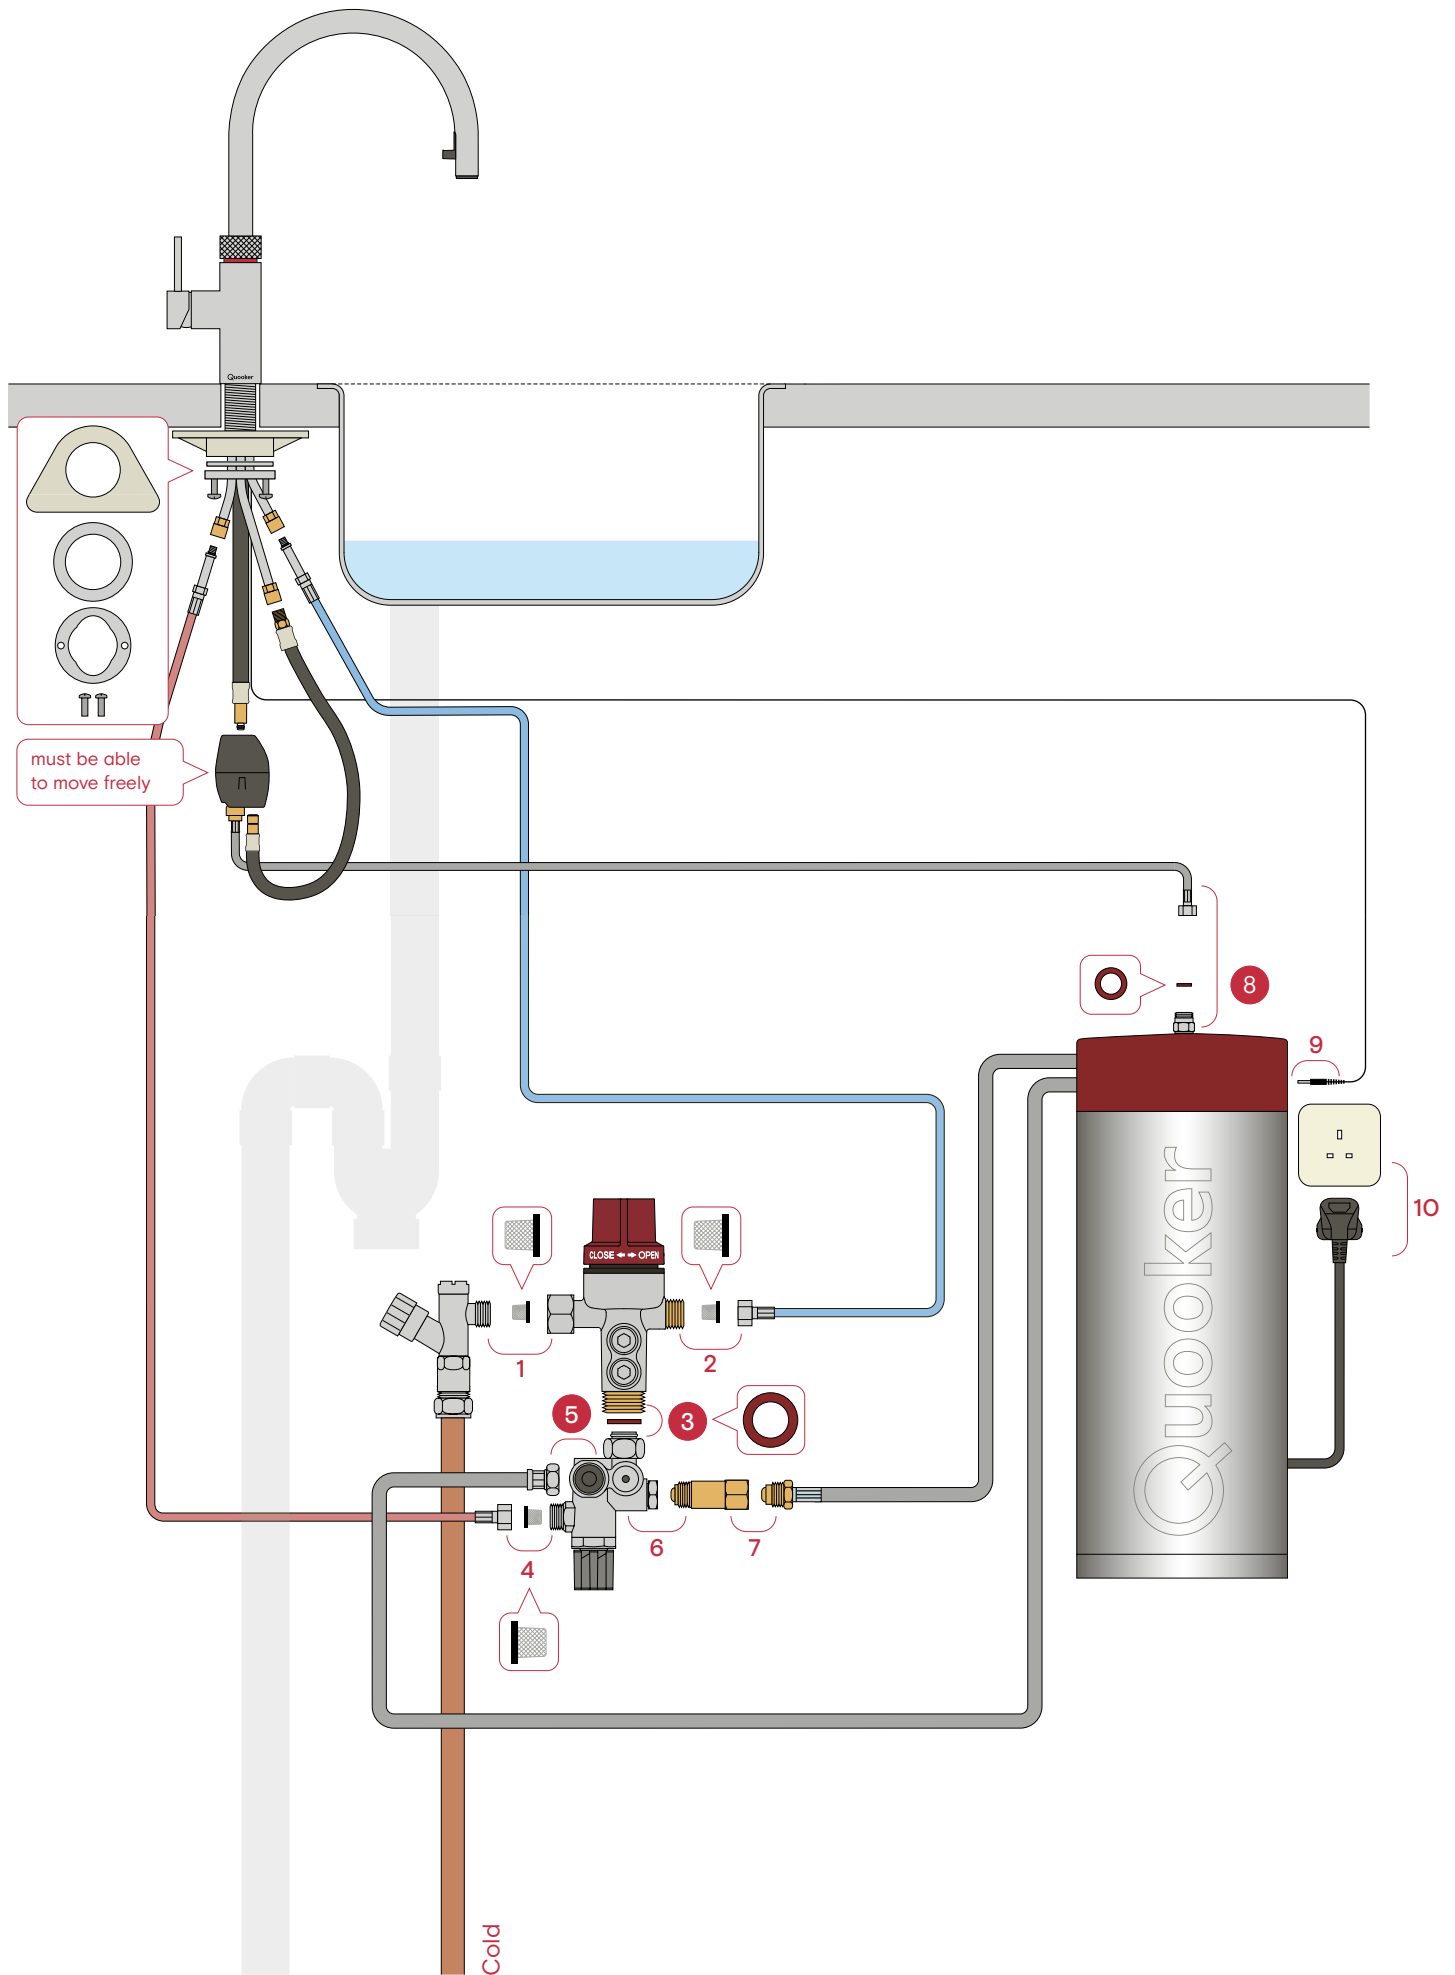

Flex

Additional supplies needed: Cross-Head Screwdriver, Spanner 10 and 12.

Follow these steps to connect the Flex.

The names of the parts can also be found in the contents of the package (p.6).

- Screw the supplied Hot & Cold water hoses into the tap pipes on the underside of the Flex. Tighten using Spanner 10.
- Screw the supplied black Mixer Hose onto the remaining tap pipe on the underside of the Flex. Tighten using Spanner 12.
- Carefully bend the tap pipes together and insert the tap through the tap hole (35 mm) in the work surface.
Tip: if the tap is difficult to push through the tap hole, carefully extract the Pull-out Hose from the spout until it just barely protrudes from the bottom of the tap's screw thread. Do not pull the hose too far out of the spout. If this does happen, push the hose back with a rotating motion. This may take several attempts.

- Attach the White Tap Support (only necessary for Stainless Steel sinks or work surface that is < 10 mm thick), the Metal Washer and then the Threaded Ring on the underside of the tap, and tighten.
- Insert the Screws into the Threaded Ring and tighten them loosely.
- Turn the tap so the logo faces front.
- Now tighten the Screws tightly with a screwdriver.
- Now push both black hoses into the Counterweight as shown below. The hoses are correctly attached when there is barely any brass visible on the pipe connections.


Loosening the Counterweight: If necessary, the Counterweight can be detached using the supplied Quick-Release Tool. Press the Release Tool flat against the coupling to hold it still. This allows the hose to be pulled-out.

COMBI+

Additional supplies needed: Water Pump Pliers, Spanner 12, 14, 17, 19, 22 and 24.

Close the main Stopcock or Isolation Valves. Then follow the 11 steps from the installation overview on the opposite side. The names of the parts can be found in the contents of the package (p. 8). Only the steps with a red background have and additional explanation:

- At step 5, make sure that the temperature setting knob on the Mixer Valve remains accessible. This knob allows you to set the temperature of the Hot water (between K-40 °C and W-60 °C).




- In steps 6 and 8, the connections are fitted with compression fittings so no Gasket or Washers are needed between them.
- At step 9, use Spanners 12 and 14 to securely tighten the boiling water hose to the tank.

Installation finished? Then follow the next steps:

- Open the boiling-water tap (push-push-turn) and leave it open.
- Open the main Stopcock or Isolation Valves. Open the Black and Red Quooker Reducing Valves and check for leaks.
- Let the water run. Black water will flow out first, this is Activated Carbon from the filter and is harmless. Wait until the water runs clear, then turn off the boiling-water tap.
- Turn on the tank using the Q-switch located on the lid of the tank.
- Wait 20 minutes for the system to heat-up; the LED ring on the tap will then turn off.

The Quooker system is now ready for use.

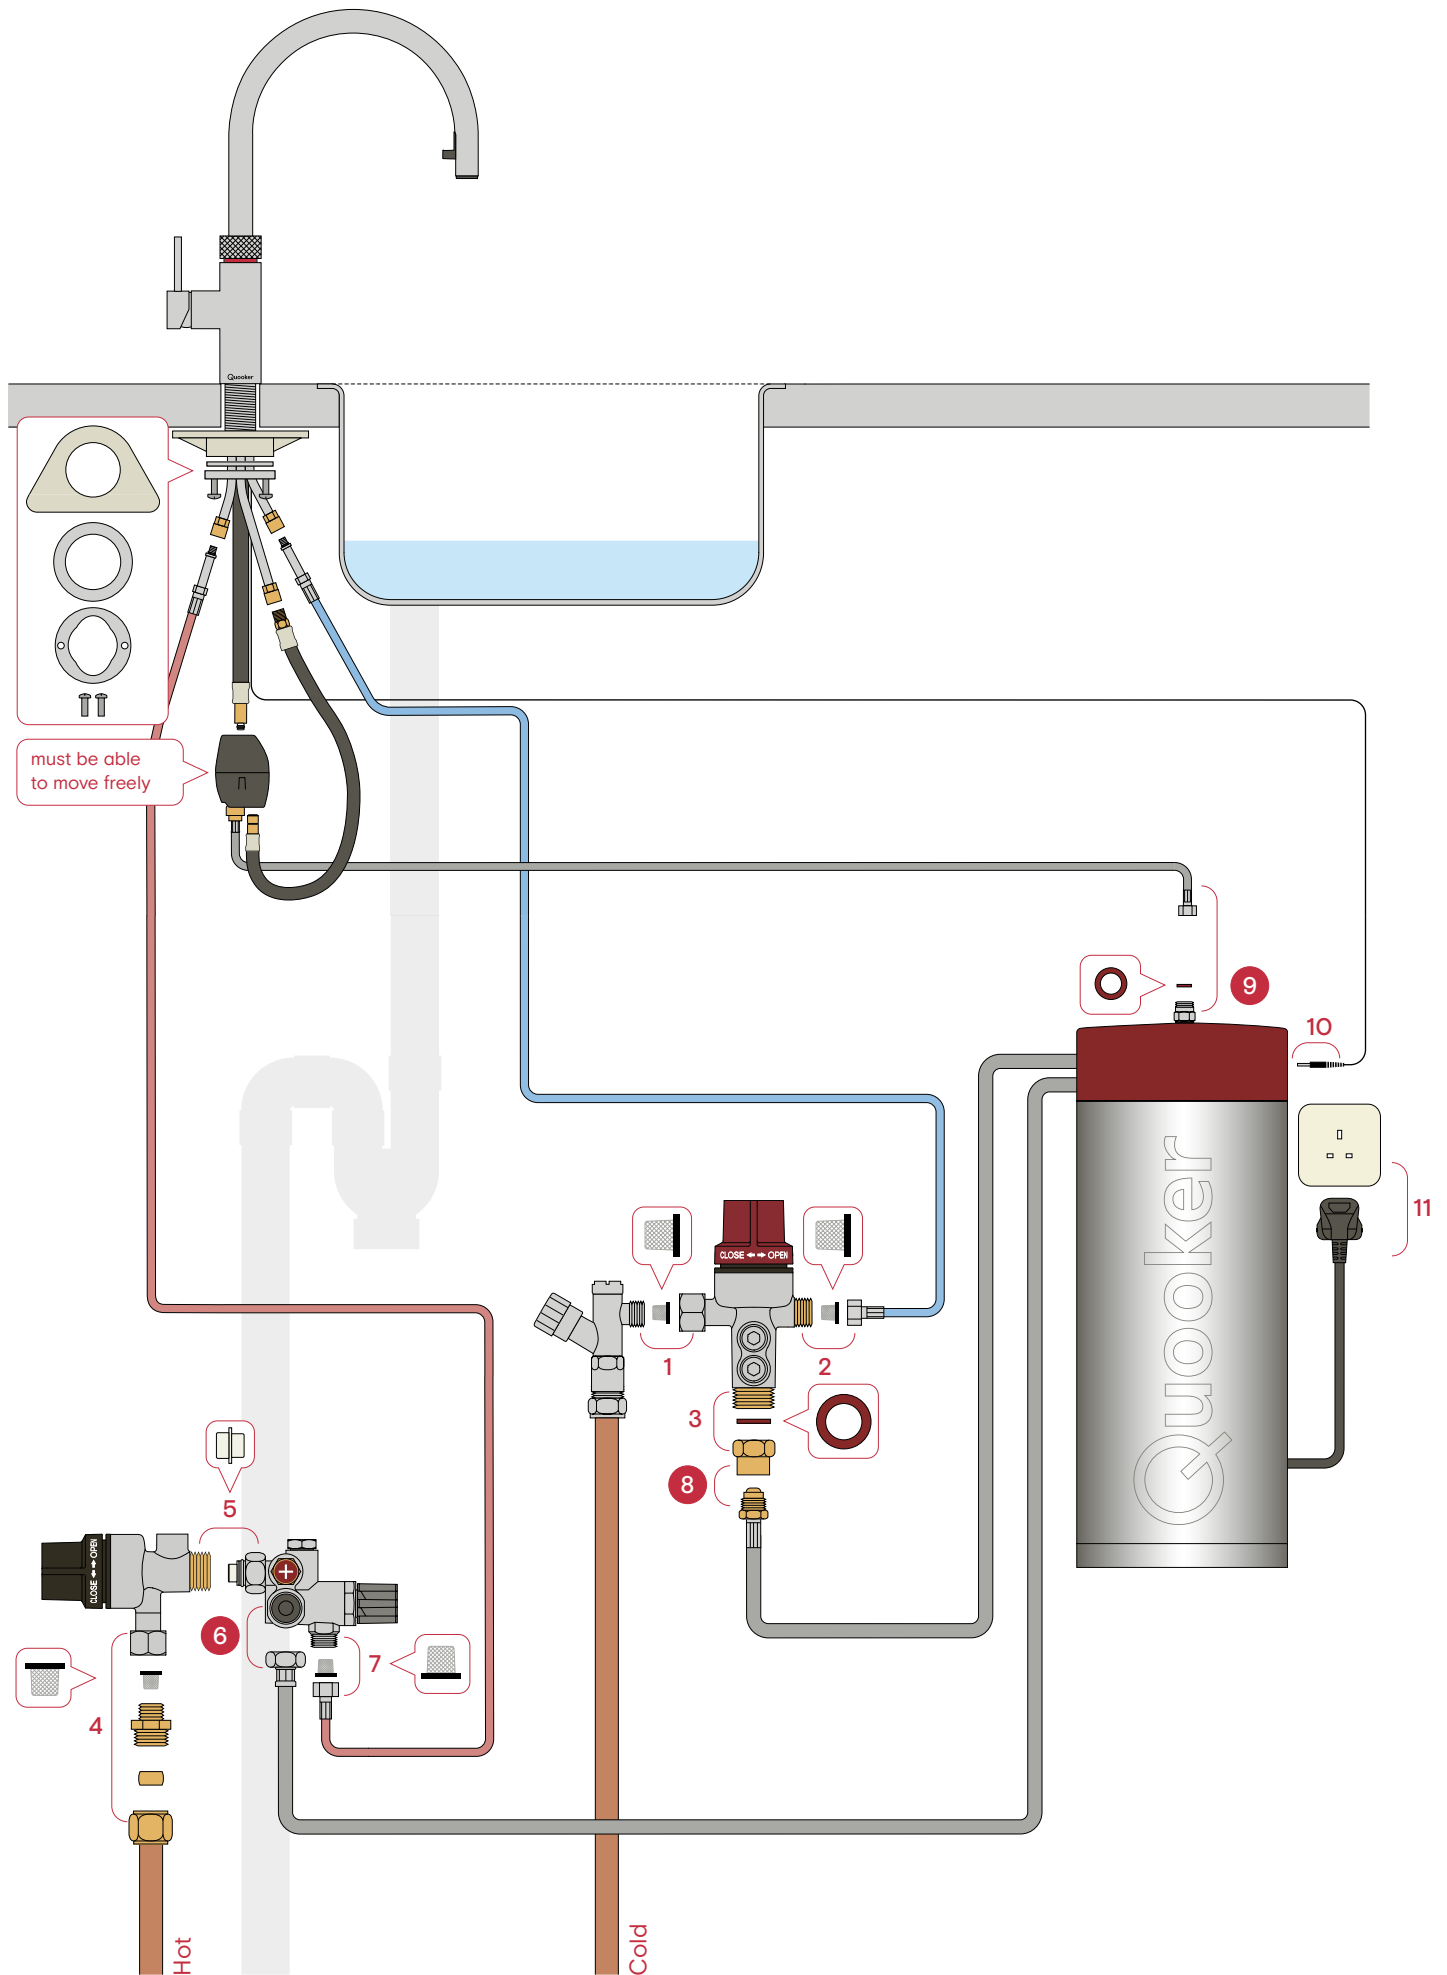


Front

Additional supplies needed: Cross-Head Screwdriver.

Follow the steps below to connect the Front tap.

The names of the parts can also be found in the contents of the package (p. 7).

Note: The Front is provided as standard with a Locking Pin that blocks the clicking of the Textured Ring. If you connect a CUBE to your Quooker system, you must remove the Locking Pin before you can utilise the CUBE functions. In this case, unscrew the Locking Pin anticlockwise from the underside of the tap before you install the Front tap. Do not remove the Locking Pin if you do not have the CUBE installed.



- Insert the tap through the tap hole (Ø 35 mm) in the work surface.
- Attach the White Tap Support (only necessary for Stainless Steel sink or work surface that is < 10 mm thick), the Metal Washer and then the Threaded Ring on the underside of the tap, and tighten.
- Insert the Screws into the Threaded Ring and tighten them loosely.
- Turn the tap so the logo faces front.
- Now tighten the Screws tightly with a Screwdriver.

PRO3

Additional supplies needed: Water Pump Pliers, Spanners 12, 14, 19, 22 and 24.


Close the main Stopcock or Isolation Valves. Then follow the 7 steps from the installation overview on the opposite side. The names of the parts can be found in the contents of the package (p. 8). Only the step with the red background has an additional explanation:

- At step 5, use Spanners 12 and 14 to securely tighten the boiling water hose to the tank.

Installation finished? Then follow the next steps:

- Open the boiling-water tap (push-push-turn) and leave it open.
- Open the main Stopcock or Isolation Valves. Open the Red Quooker Reducing Valve and check for leaks.
- Let the water run. Black water will flow out first, this is Activated Carbon from the filter and is harmless. Wait until the water runs clear, then turn off the boiling-water tap.
- Turn on the tank using the Q-switch located on the lid of the tank.
- Wait 15 minutes for the system to heat-up; the LED ring on the tap will then turn off.

The Quooker system is now ready for use.

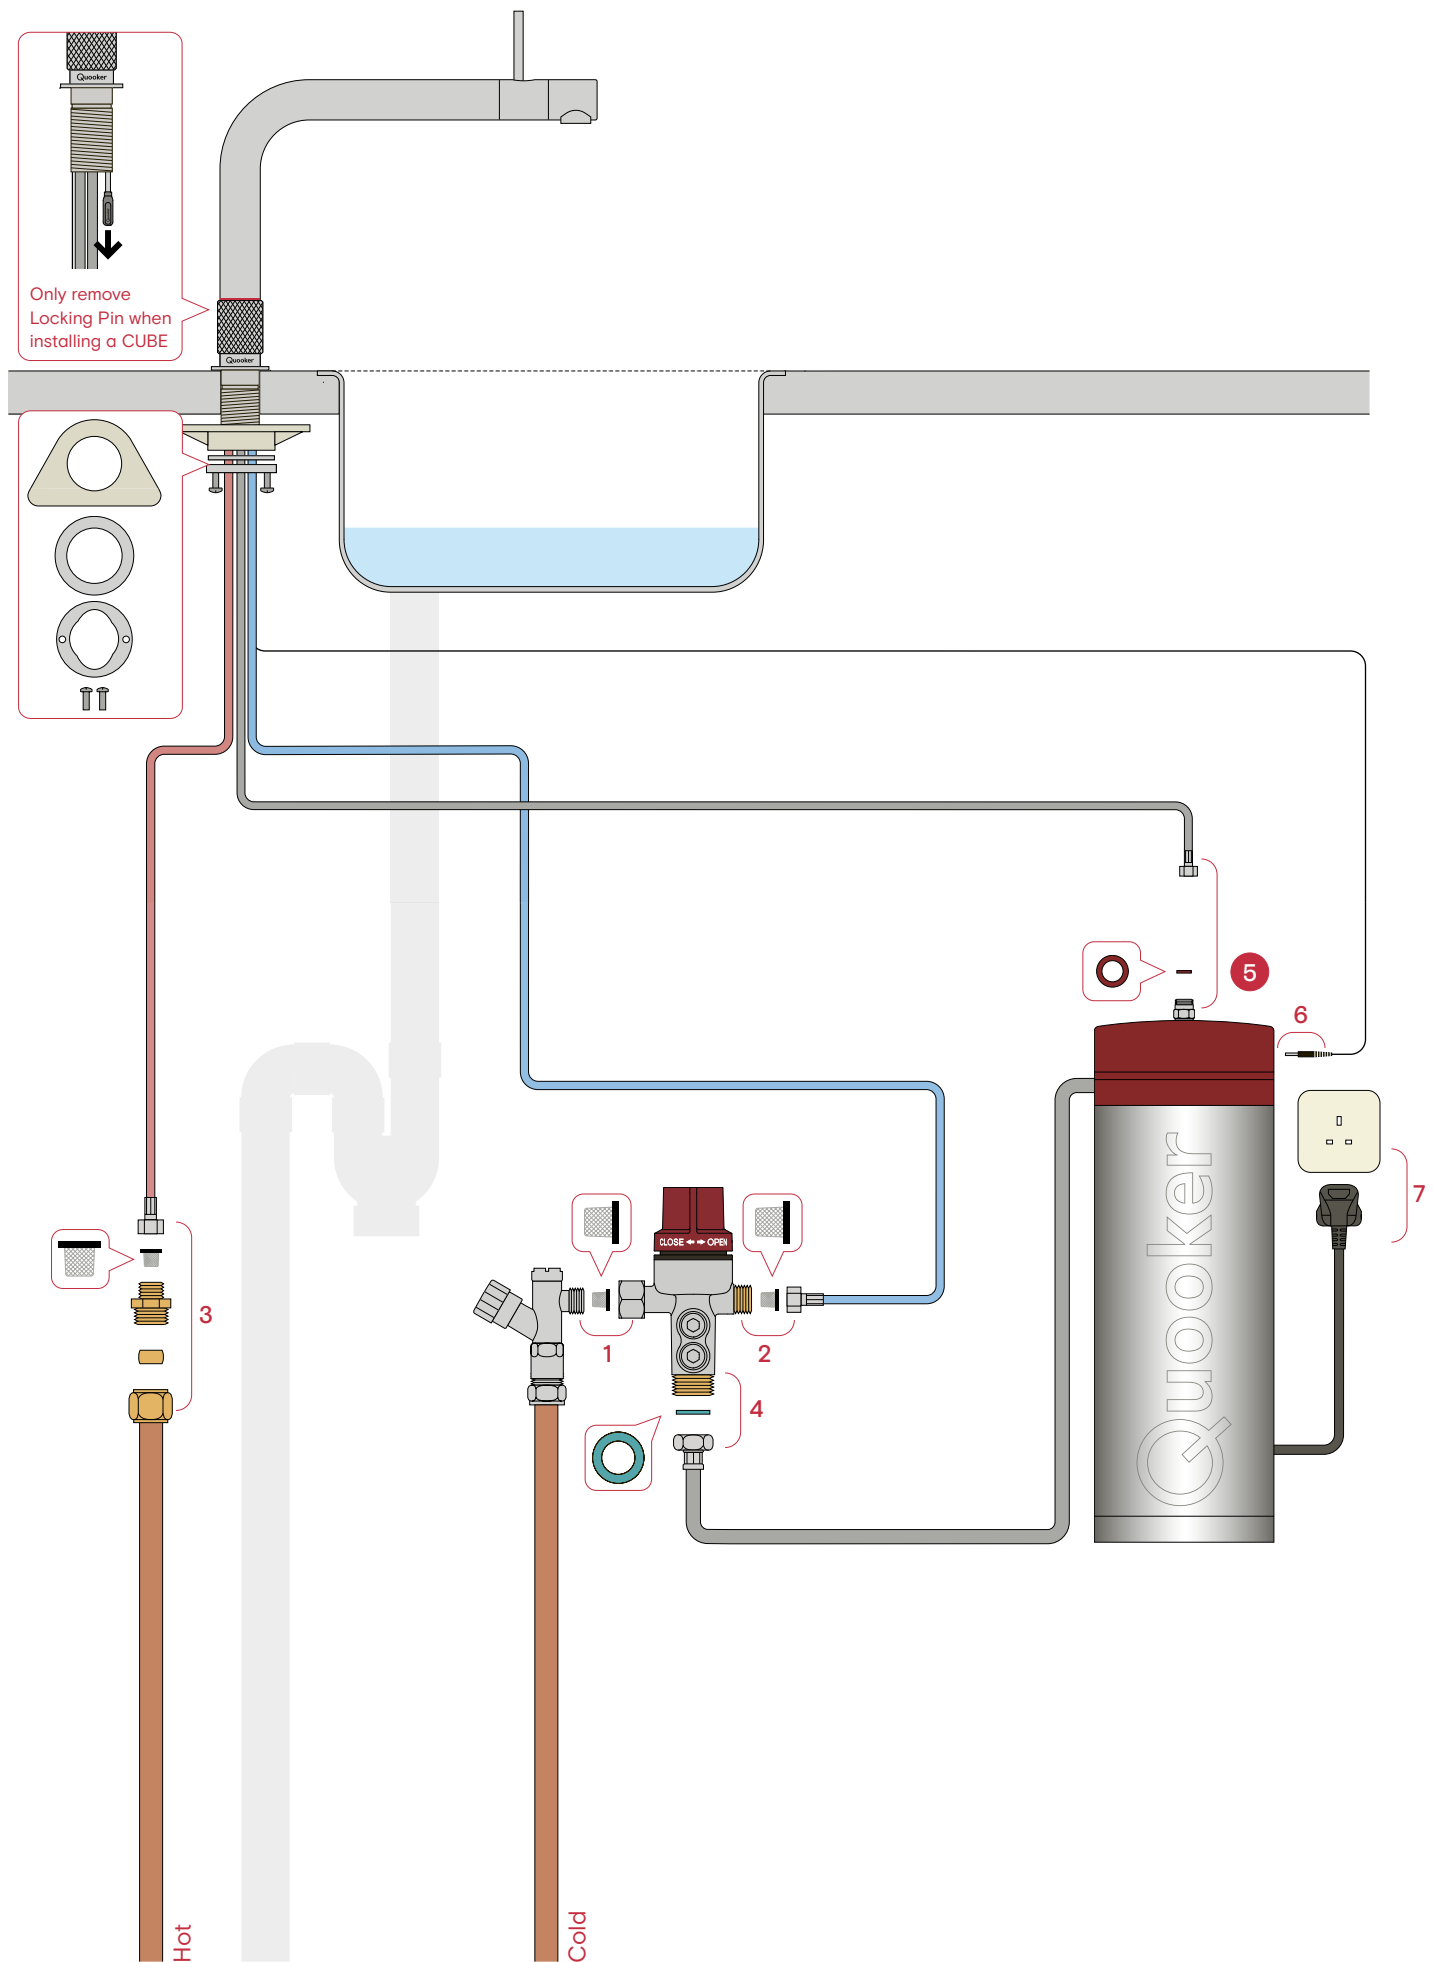


Front

Additional supplies needed: Cross-Head Screwdriver.

Follow the steps below to connect the Front tap.

The names of the parts can also be found in the contents of the package (p. 7).

Note: The Front is provided as standard with a Locking Pin that blocks the clicking of the Textured Ring. If you connect a CUBE to your Quooker system, you must remove the Locking Pin before you can utilise the CUBE functions. In this case, unscrew the Locking Pin anticlockwise from the underside of the tap before you install the Front tap. Do not remove the Locking Pin if you do not have the CUBE installed.




- Insert the tap through the tap hole (Ø 35 mm) in the work surface.
- Attach the White Tap Support (only necessary for Stainless Steel sink or work surface that is < 10 mm thick), the Metal Washer and then the Threaded Ring on the underside of the tap, and tighten.
- Insert the Screws into the Threaded Ring and tighten them loosely.
- Turn the tap so the logo faces front.
- Now tighten the Screws tightly with a Screwdriver.

COMBI

Additional supplies needed: Water Pump Pliers, Spanner 12, 14, 17, 19, 22 and 24.

Close the main Stopcock or Isolation Valve. Then follow the 10 steps from the installation overview on the opposite side. The names of the parts can be found in the contents of the package (p. 8). Only the steps with a red background have and additional explanation:

- At step 3, make sure that the temperature setting knob on the Mixer Valve remains accessible. This knob allows you to set the temperature of the Hot water (between K-40 °C and W-60 °C).




- In steps 5, 6 and 7, the connections are fitted with compression fittings so no Gasket or Washers are needed between them.
- At step 8, use Spanners 12 and 14 to securely tighten the boiling water hose to the tank.

Installation finished? Then follow the next steps:

- Open the boiling-water tap (push-push-turn) and leave it open.
- Open the main Stopcock or Isolation Valves. Open the Red Quooker Reducing Valve and check for leaks.
- Let the water run. Black water will flow out first, this is Activated Carbon from the filter and is harmless. Wait until the water runs clear, then turn off the boiling-water tap.
- Turn on the tank using the Q-switch located on the lid of the tank.
- Wait 20 minutes for the system to heat-up; the LED ring on the tap will then turn off.

The Quooker system is now ready for use.

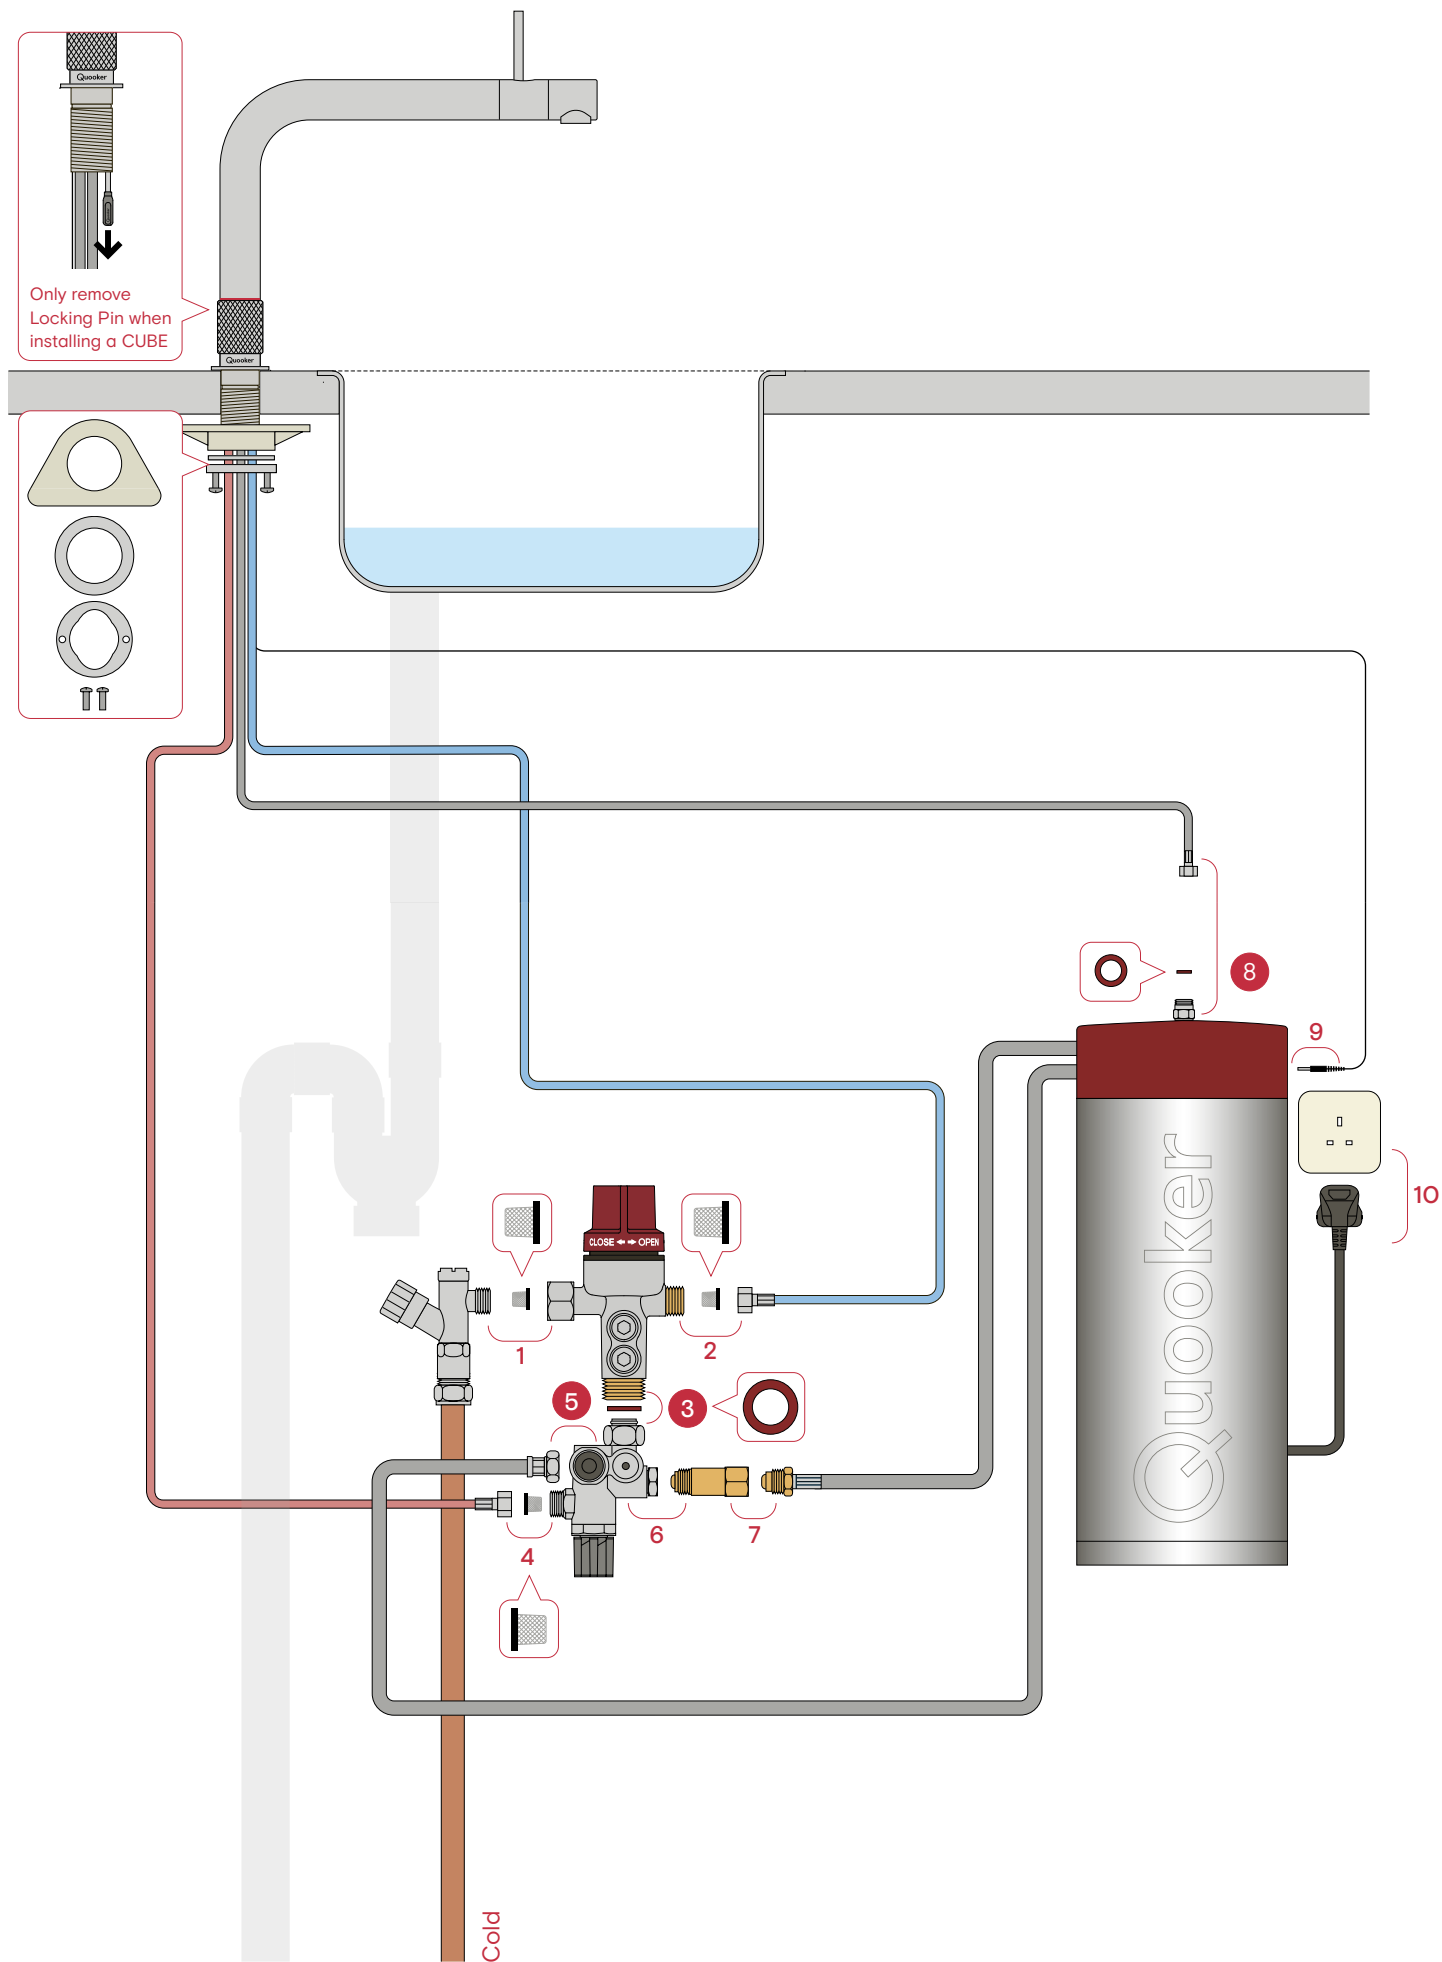


Front

Additional supplies needed: Cross-Head Screwdriver.

Follow the steps below to connect the Front tap.

The names of the parts can also be found in the contents of the package (p. 7).

Note: The Front is provided as standard with a Locking Pin that blocks the clicking of the Textured Ring. If you connect a CUBE to your Quooker system, you must remove the Locking Pin before you can utilise the CUBE functions. In this case, unscrew the Locking Pin anticlockwise from the underside of the tap before you install the Front tap. Do not remove the Locking Pin if you do not have the CUBE installed.




- Insert the tap through the tap hole (Ø 35 mm) in the work surface.
- Attach the White Tap Support (only necessary for Stainless Steel sink or work surface that is < 10 mm thick), the Metal Washer and then the Threaded Ring on the underside of the tap, and tighten.
- Insert the Screws into the Threaded Ring and tighten them loosely.
- Turn the tap so the logo faces front.
- Now tighten the Screws tightly with a Screwdriver.

COMBI+

Additional supplies needed: Water Pump Pliers, Spanner 12, 14, 17, 19, 22 and 24.

Close the main Stopcock or Isolation Valves. Then follow the 11 steps from the installation overview on the opposite side. The names of the parts can be found in the contents of the package (p. 8). Only the steps with a red background have and additional explanation:

- At step 5, make sure that the temperature setting knob on the Mixer Valve remains accessible. This knob allows you to set the temperature of the Hot water (between K-40 °C and W-60 °C).




- In steps 6 and 8, the connections are fitted with compression fittings so no Gasket or Washers are needed between them.
- At step 9, use Spanners 12 and 14 to securely tighten the boiling water hose to the tank.

Installation finished? Then follow the next steps:

- Open the boiling-water tap (push-push-turn) and leave it open.
- Open the main Stopcock or Isolation Valves. Open the Black and Red Quooker Reducing Valves and check for leaks.
- Let the water run. Black water will flow out first, this is Activated Carbon from the filter and is harmless. Wait until the water runs clear, then turn off the boiling-water tap.
- Turn on the tank using the Q-switch located on the lid of the tank.
- Wait 20 minutes for the system to heat-up; the LED ring on the tap will then turn off.

The Quooker system is now ready for use.

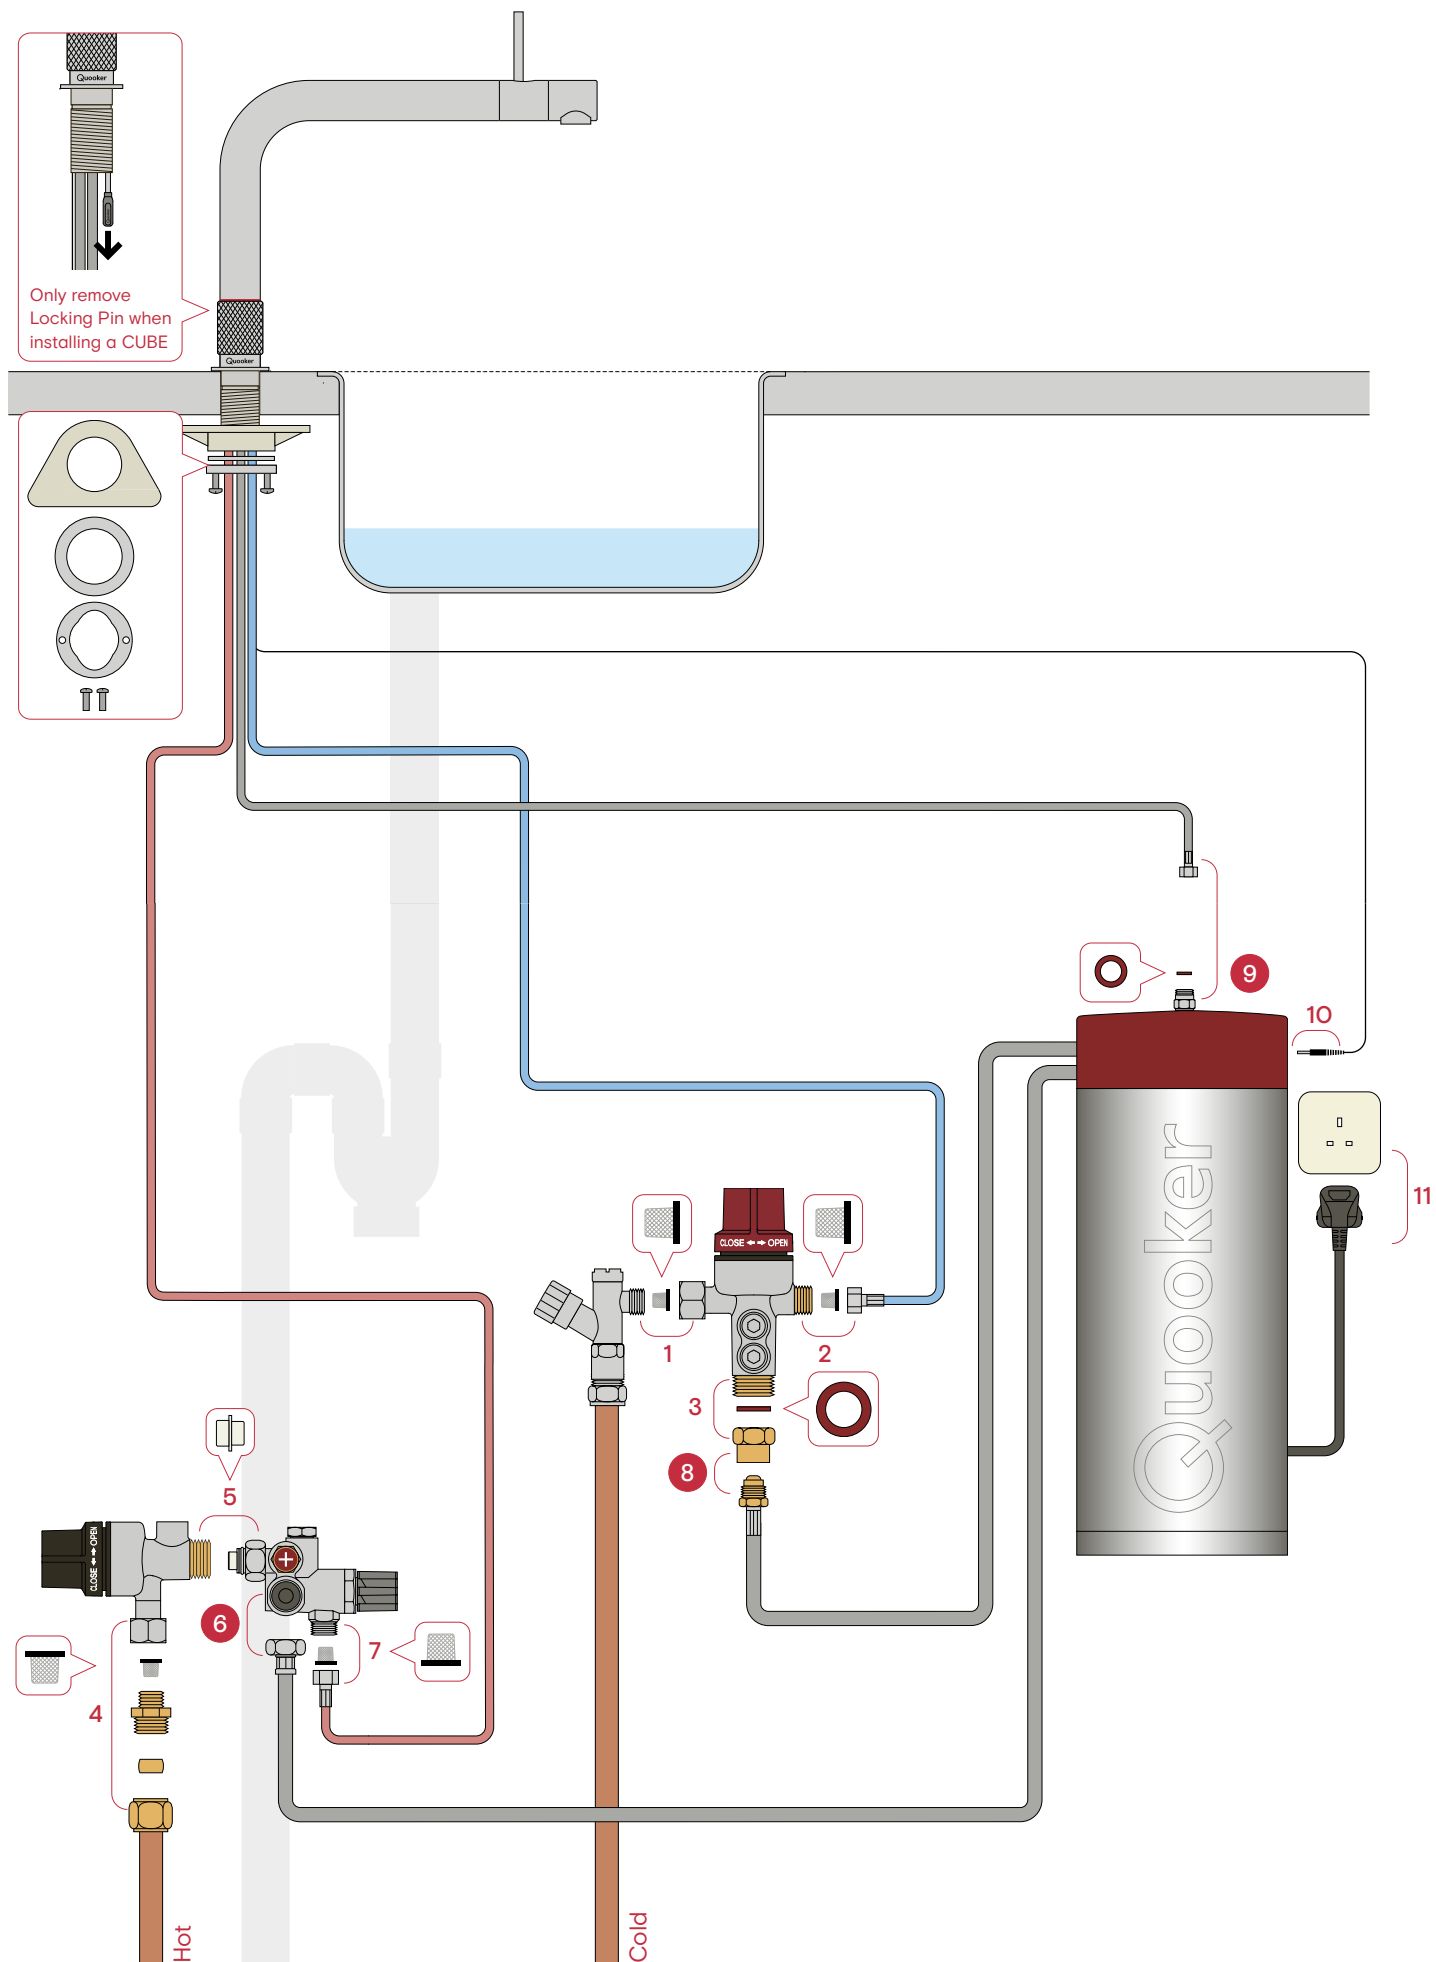

Maintenance and Service

Cleaning the tap

Below is a description for each type of finish of how best to clean the Quooker tap. After cleaning, the tap can be dried using a non-abrasive cloth or a micro-fibre cloth. This ensures a nice clean and streak-free result.

For taps with a Chrome, Stainless Steel or Gold finish, the tap can be cleaned with glass cleaner and a slightly damp cloth. Spray glass cleaner onto the cloth (not directly onto the tap) to prevent internal damage. Then rinse the cleaning cloth well with hot water and briefly squeeze out the water. Then use this cloth to remove the glass cleaner from the tap and dry the tap down with a soft cloth. Do this preferably using a micro-fibre cloth.

For taps with a Gunmetal, Rose Copper or Black finish, the best way to clean the tap is using hot water and a micro-fibre cloth. Dry the tap after use to avoid limescale. Do this preferably using a micro-fibre cloth.

Note: when using Gunmetal, Rose Copper or Black taps and accessories, do not use cleaning agents with a Carbon compound (such as Isopropanol, Alcohol, Ethanol, etc.) unless highly diluted such as glass cleaner.


In the case of a Patinated brass or Nickle finish, the best way to clean the tap is using hot water and a micro-fibre cloth. DO NOT use cleaning agents, as this may permanently damage the tap's finish. Treat the tap once every 3 to 6 months with Beeswax.

Note: cleaning products such as dish brushes, scouring sponges, limescale remover and acids or solvents can damage the inside and outside of the tap.

Cleaning tap filter

When the water flow becomes reduced, you can remove the tap filter (the Aerator) and place it in Vinegar for about an hour. Then rinse off the limescale and put the Aerator back in place.

Note: if you have a Front tap, use the provided Aerator Key to remove and re-install the tap filter.

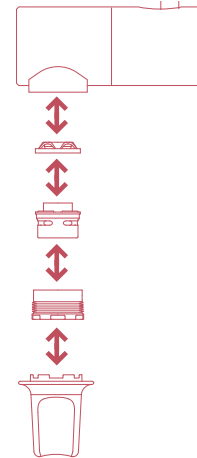

Tank Maintenance

When the Quooker tap still doesn't produce an optimal water flow, even after the Aerator has been cleaned, we advise you to carry out maintenance. You can contact our service department via the contact form in your My Quooker account.

Warranty

The warranty period for Quooker products is two years, as per our general Terms and Conditions. Register your Quooker system at quooker.co.uk/customer for this warranty.

Do you still have questions?

If you have questions or if you have a problem with your Quooker system, go to quooker.co.uk or use our Self-Service at quooker.co.uk/self-service. If the answer to your question is not listed on our website, log into your My Quooker account or simply create a My Quooker account to contact our Service department.

Disconnect tank (in case of service)

1 Turning off

Turn off the Quooker tank using the Q-switch located on the lid of the tank. Leave the power plug in the socket.

2. Cooling-off the tank


Open the boiling-water tap (push-push-turn) and the cold water tap at the same time. Only close both, once the water runs completely cold.

3. Closing

Close the main Stopcock or Isolation Valves. Check if the system is depressurized by opening the boiling-water tap again. If properly depressurized, no more water will flow from the tap.

4. Uncoupling

Uncouple the hoses. In the case of a Quooker PRO3 this is one fewer hose than is indicated in the illustration. Pull the Jack Plug out of the tank lid. Pull the power plug out of the socket. In the case of a COMBI or COMBI+, allow the unit to empty over the sink.

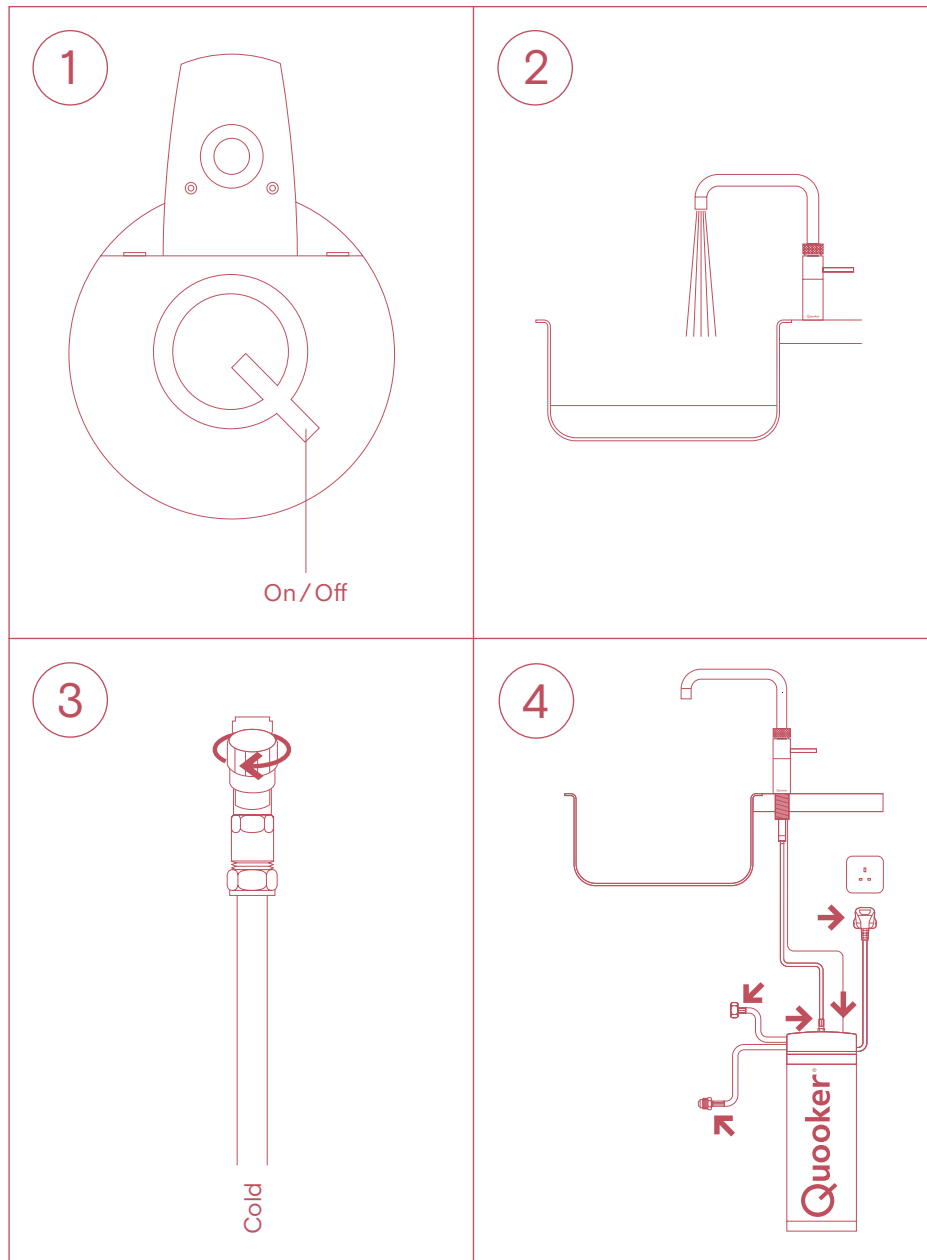

Quooker®

Quooker UK Ltd.
Beaumont Buildings
Great Ducie Street Manchester M3 1PQ
+44 (0)161 768 5900
service@quooker.co.uk
www.quooker.co.uk